

YOKE®

Safety is our first priority™

YP™

Yellow Point



Catalog No. 8-2015.YP








YOKE Yellow Point Series

Worldwide Quality Type Approval And Certificate:

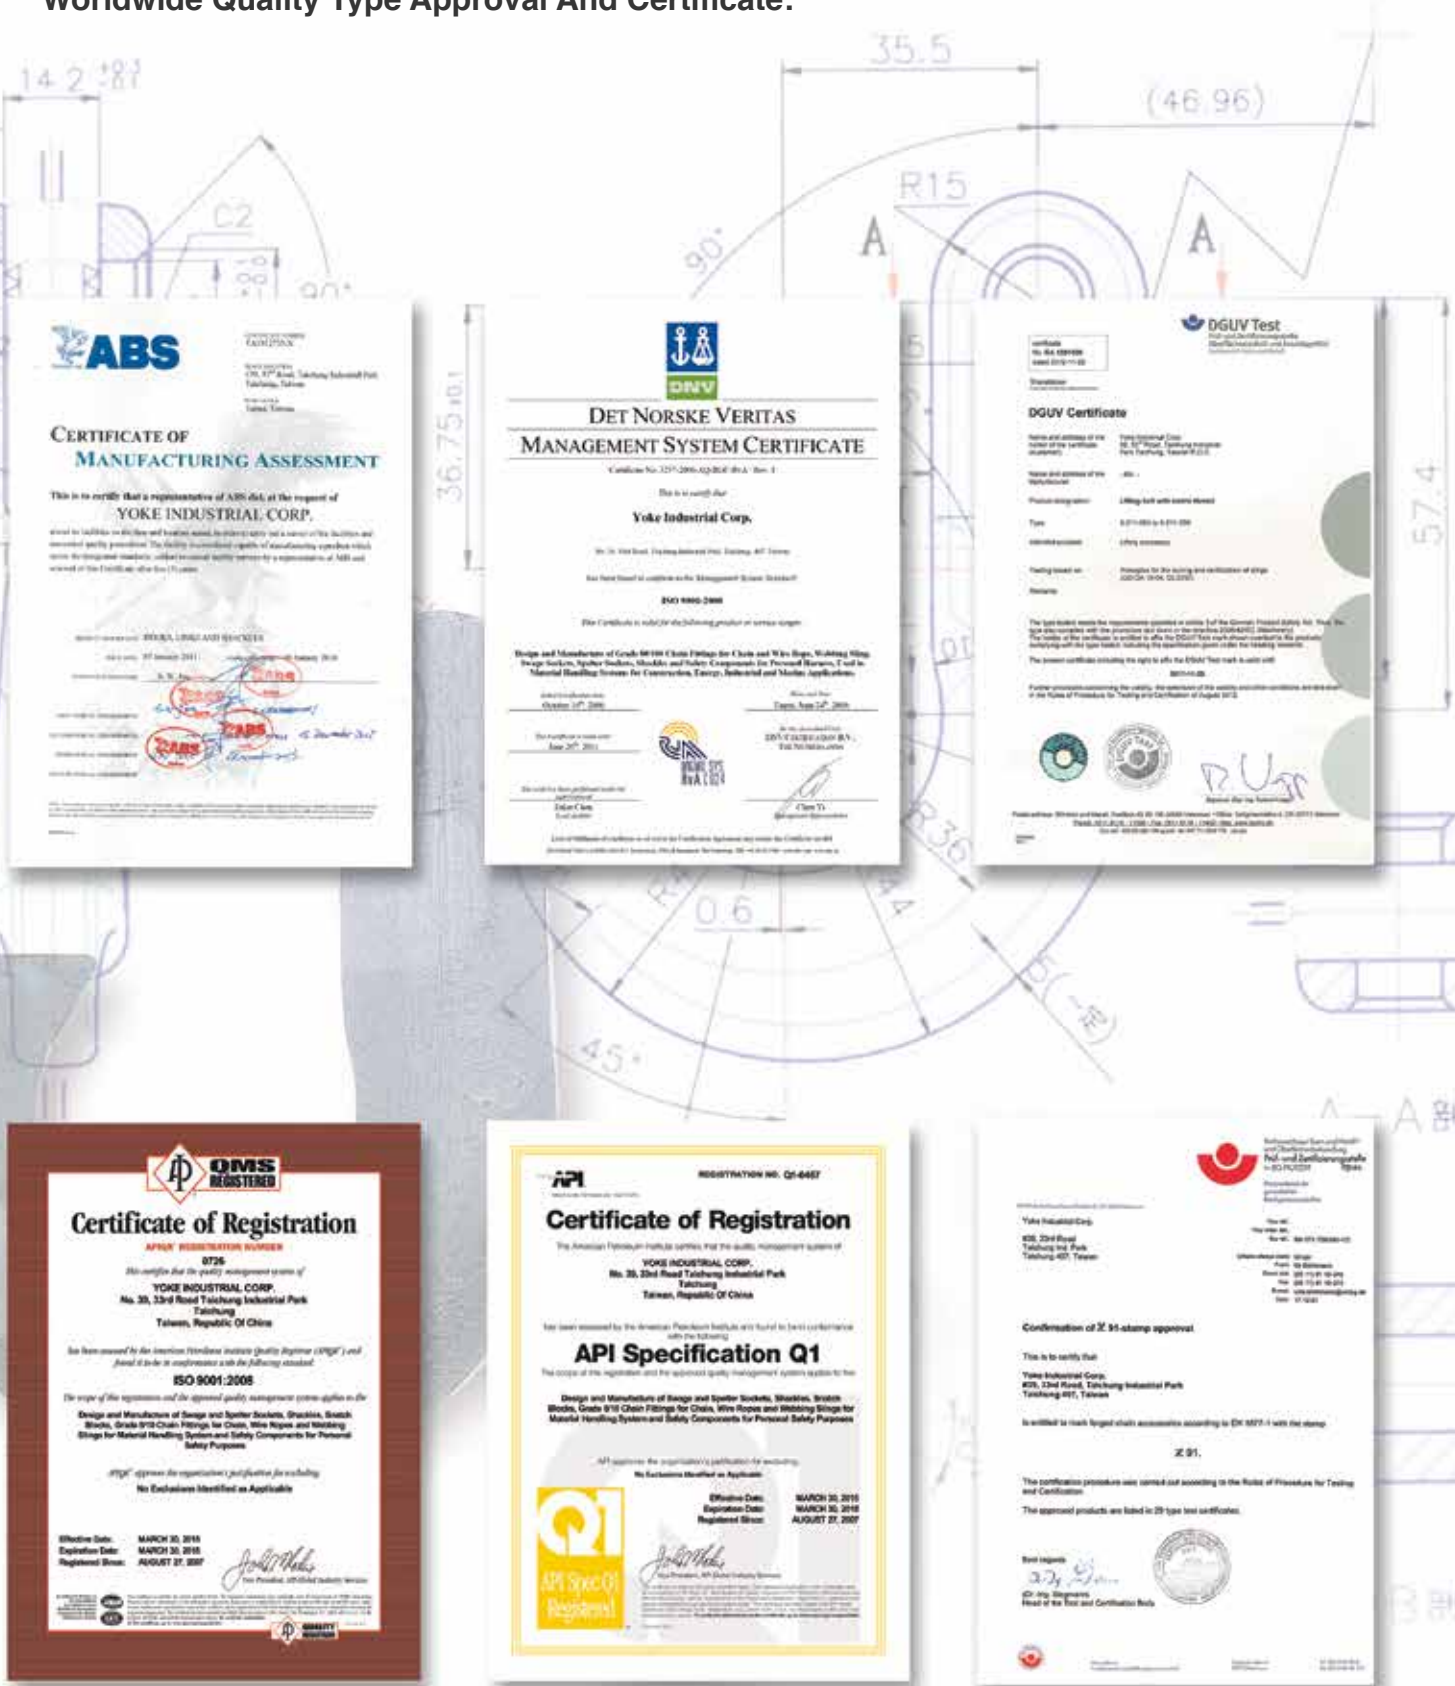

Quality Control, Testing, and Detecting during manufacturing

YOKE runs a constant and strict production facility with quality control in every manufacturing stage from raw materials to the completed product. YOKE is an ISO 9001 certified company and has Type Approval by the major international authorities from Deutsche Gesetzliche Unfallversicherung (DGUV) , ABS, API, and DNV. YOKE has achieved CNLA certification - Chinese National Laboratory Accreditation which ensures a quality research and development (R&D) department and unsurpassed product engineering.

■ **Magnaflux Crack Detection:**

All forged components are individually magnaflux detected after heat treatment.

■ **Spectrographic Analysis:**

To assure of the proper metallurgy content of all raw materials.

■ **Proof Load Testing:**

YOKE Yellow Points are proof load qualified to 2.5 times the Working Load Limit within 1% permanent deformation.

■ **Dynamic Fatigue Testing:**

Batch samples of YOKE Yellow Points are Dynamic Fatigue Tested to 20,000 cycles at 1.5 times the Working Load Limit.

■ **Ultimate Breaking Load Testing:**

Batch samples are tested in a static tensile testing machine until failure. Minimum ultimate force equals to the Working Load Limit times safety factor.

Test certificate
Complied to EN10204



Spectrographic Analysis



Magnaflux Crack Detection



Dimension Examination



Micrographic Analysis



Fatigue Cycle Test



Tensile Test, Capacity 300 tonnes











Safety is our first priority™

- Quality, Reliability, Innovation -



Bolt Lifting Points







		8-211 Lifting Point																8-291K / 8-291 Eye Point										
																												
Number of legs	Load direction	Item No.																										
		Thread Size	8-211-003	8-211-006	8-211-010	8-211-012	8-211-015	8-211-020	8-211-025	8-211-040	8-211-042	8-211-050	8-211-070	8-211-080	8-211-100	8-211-150	8-211-200	8-291K-003	8-291K-004	8-291K-007	8-291K-015	8-291K-023	8-291K-032	8-291K-045	8-291K-070	8-291K-090	8-291K-120	
	1 0°		0.3	0.63	1	1.2	1.5	2	2.5	4	4	5	7	8	10	15	20	1	1	2	4	6	8	12	16	24	32	
	2 0°		0.6	1.26	2	2.4	3	4	5	8	8	10	14	16	20	30	40	2	2	4	8	12	16	24	32	48	64	
	1 90°		0.3	0.63	1	1.2	1.5	2	2.5	4	4	5	7	8	10	15	20	0.3	0.4	0.75	1.5	2.3	3.2	4.5	7	9	12	
	2 90°		0.6	1.26	2	2.4	3	4	5	8	8	10	14	16	20	30	40	0.6	0.8	1.5	3	4.6	6.4	9	14	18	24	
	2 0-45°		0.42	0.88	1.4	1.7	2.1	2.8	3.5	5.6	5.6	7	9.8	11.2	14	21	28	0.42	0.56	1	2.1	3.2	4.5	6.3	9.8	12.6	16.8	
	2 45-60°		0.3	0.63	1	1.2	1.5	2	2.5	4	4	5	7	8	10	15	20	0.3	0.4	0.75	1.5	2.3	3.2	4.5	7	9	12	
	2 unsymm.		0.3	0.63	1	1.2	1.5	2	2.5	4	4	5	7	8	10	15	20	0.3	0.4	0.75	1.5	2.3	3.2	4.5	7	9	12	
	3-4 0-45°		0.63	1.32	2.1	2.5	3.1	4.2	5.2	8.4	8.4	10.5	14.7	16.8	21	31.5	42	0.63	0.8	1.5	3.1	4.8	6.7	9.4	14.7	18.9	25	
	3-4 45-60°		0.45	0.95	1.5	1.8	2.2	3	3.7	6	6	7.5	10.5	12	15	22.5	30	0.45	0.6	1.1	2.2	3.4	4.8	6.7	10.5	13.5	18	
	3-4 unsymm.		0.3	0.63	1	1.2	1.5	2	2.5	4	4	5	7	8	10	15	20	0.3	0.4	0.75	1.5	2.3	3.2	4.5	7	9	12	
		Thread Size	M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 24	M 27	M 30	M 36	M 36	M 42	M 42	M 48	M 8	M 10	M 12	M 16	M 20	M 24	M 30	M 36	M 42	M 48	

**8-271
Swivel Point**



Diagram	Number of legs	Load direction	Item No.		Thread Size		WLL (kg)		WLL (lb)															
			8-271-003	8-271-004	8-271-006	8-271-013	8-271-020	8-271-035	8-271-060	8-271-061	8-271-080	8-271-081	8-271-120	8-271-130	8-271-131	8-271-140	8-271-160	8-271-161	8-271-162	8-271-310	8-271-350	8-271-400	8-271-401	
	1	0°	0.6	0.9	1.2	2.6	4	7	10	12.5	15	15	17	18	17	25	28	28	28	28	50	50	50	50
	2	0°	1.2	1.8	2.4	5.2	8	14	20	25	30	30	34	36	34	50	56	56	56	56	100	100	100	100
	1	90°	0.3 (0.4)	0.45 (0.6)	0.6 (0.7)	1.3 (1.5)	2 (2.5)	3.5 (4)	5 (6)	6 (7.5)	8 (10)	8 (10)	12 (13)	13 (16)	12 (13)	14 (20)	16 (22)	16 (25)	16 (22)	16 (22)	31.5 (40)	35 (48)	40 (50)	40 (50)
	2	90°	0.6 (0.8)	0.9 (1.2)	1.2 (1.5)	2.6 (3)	4 (5)	7 (8)	10 (12)	12 (15)	16 (20)	16 (20)	24 (26)	26 (32)	24 (26)	28 (40)	32 (44)	32 (50)	32 (44)	32 (44)	63 (80)	70 (96)	80 (100)	80 (100)
	2	0-45°	0.4	0.6	0.8	1.8	2.8	4.9	7	8.4 (10.5)	11.2 (14)	11.2 (14)	16.8 (18.2)	18.2 (22.4)	16.8 (18.2)	19.6 (28)	22.4 (30.8)	22.4 (35)	22.4 (30.8)	44.1 (56)	49 (67.2)	56 (70)	56 (70)	56 (70)
	2	45-60°	0.3	0.4	0.6	1.3	2	3.5	5	6 (7.5)	8 (10)	8 (10)	12 (13)	13 (16)	12 (13)	14 (20)	16 (22)	16 (25)	16 (22)	16 (22)	31.5 (40)	35 (48)	40 (50)	40 (50)
	2	unsymm.	0.3	0.4	0.6	1.3	2	3.5	5	6 (7.5)	8 (10)	8 (10)	12 (13)	13 (16)	12 (13)	14 (20)	16 (22)	16 (25)	16 (22)	16 (22)	31.5 (40)	35 (48)	40 (50)	40 (50)
	3-4	0-45°	0.6	0.9	1.2	2.7	4.2	7.3	10.5	12.6 (15.7)	16.8 (21)	16.8 (21)	25.2 (27.3)	27.3 (33.6)	25.2 (27.3)	29.4 (42)	33.6 (46.2)	33.6 (52.5)	33.6 (46.2)	66.15 (84)	73.5 (100)	84 (105)	84 (105)	84 (105)
	3-4	45-60°	0.4	0.6	0.9	1.9	3	5.2	7.5	9 (11.2)	12 (15)	12 (15)	18 (19.5)	19.5 (24)	18 (19.5)	21 (30)	24 (33)	24 (37.5)	24 (33)	24 (33)	47.25 (60)	52.5 (72)	60 (75)	60 (75)
	3-4	unsymm.	0.3	0.4	0.6	1.3	2	3.5	5	6 (7.5)	8 (10)	8 (10)	12 (13)	13 (16)	12 (13)	14 (20)	16 (22)	16 (25)	16 (22)	16 (22)	31.5 (40)	35 (48)	40 (50)	40 (50)
			Thread Size	M 8	M 10	M 12	M 16	M 20	M 24	M 30	M 33	M 36	M 36-39	M 42	M 48	M 42-52	M 52	M 56	M 64	M 56-85	M 72	M 80	M 90	M 90-150

8-231 Anchor Point														8-203 Hoist Ring													
																											
8-231-005	8-231-007	8-231-010	8-231-015	8-231-020	8-231-025	8-231-030	8-231-050	8-231-056	8-231-078	8-231-125	8-231-156	8-231-200	8-231-220	8-231-225	8-203-004	8-203-005	8-203-010	8-203-019	8-203-021	8-203-030	8-203-042	8-203-070	8-203-110	8-203-125	8-203-135	8-203-155	8-203-223
M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 24	M 27	M 30	M 36	M 42	M 48	M 56	M 64	M 8	M 10	M 12	M 16	M 20	M 20	M 24	M 30	M 36	M 42	M 48	M 56	M 64
0.5	0.7	1	1.5	2	2.5	3	5	5.6	7.8	12.5	15.6	20	22	22.5	0.5	0.55	1.3	2.4	2.7	3.75	5.25	8.75	13.75	15.6	16.9	19.4	27.9
1	1.4	2	3	4	5	6	10	11.2	15.6	25	31.2	40	44	45	1	1.1	2.6	4.8	5.4	7.5	10.5	17.5	27.5	31.2	33.8	38.8	55.8
0.5	0.7	1	1.5	2	2.5	3	5	5.6	7.8	12.5	15.6	20	22	22.5	0.5	0.55	1.3	2.4	2.7	3.75	5.25	8.75	13.75	15.6	16.9	19.4	27.9
1	1.4	2	3	4	5	6	10	11.2	15.6	25	31.2	40	44	45	1	1.1	2.6	4.8	5.4	7.5	10.5	17.5	27.5	31.2	33.5	38.8	55.8
0.7	1	1.4	2.1	2.8	3.5	4.2	7	7.8	10.9	17.5	21.8	28	30.8	31.5	0.7	0.77	1.82	3.36	3.78	5.25	7.35	12.25	19.25	21.84	23.66	27.2	39.1
0.5	0.7	1	1.5	2	2.5	3	5	5.6	7.8	12.5	15.6	20	22	22.5	0.5	0.55	1.3	2.4	2.7	3.75	5.25	8.75	13.75	15.6	16.9	19.4	27.9
0.5	0.7	1	1.5	2	2.5	3	5	5.6	7.8	12.5	15.6	20	22	22.5	0.5	0.55	1.3	2.4	2.7	3.75	5.25	8.75	13.75	15.6	16.9	19.4	27.9
1.1	1.5	2.1	3.2	4.2	5.3	6.3	10.5	11.8	16.4	26.3	32.8	42	46.2	47.3	1.05	1.16	2.73	5.04	5.67	7.88	11.03	18.38	28.88	32.76	35.49	40.7	58.6
0.8	1.1	1.5	2.3	3	3.8	4.5	7.5	8.4	11.7	18.8	23.4	30	33	33.8	0.75	0.83	1.95	3.6	4.05	5.63	7.88	13.13	20.63	23.4	25.35	29.1	41.9
0.5	0.7	1	1.5	2	2.5	3	5	5.6	7.8	12.5	15.6	20	22	22.5	0.5	0.55	1.3	2.4	2.7	3.75	5.25	8.75	13.75	15.6	16.9	19.4	27.9
M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 24	M 27	M 30	M 36	M 42	M 48	M 56	M 64	M 8	M 10	M 12	M 16	M 20	M 20	M 24	M 30	M 36	M 42	M 48	M 56	M 64

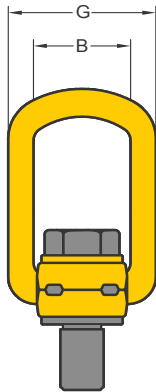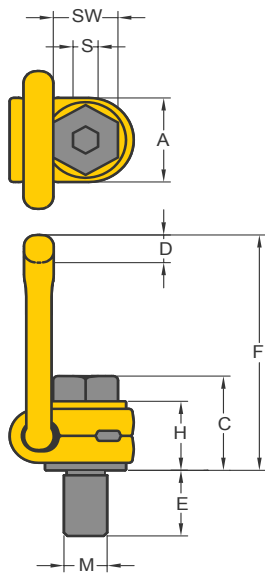

Patent Pending



Lifting Point

Metric Thread (8-211)

Item No.	Working Load Limit tonnes*	Thread M	Dimensions (mm)										Torque in Nm	N.W. kg	Repair Kits
			A	B	C	D	E	F	G	H	S	SW			
8-211-003	0.3	M 8	30	35	35	10	11 (16)	85	55	29	6	13	30	0.2	8-P211-003
8-211-006	0.63	M10	30	35	36	10	16 (21)	85	55	29	6	17	60	0.3	8-P211-006
8-211-010	1	M12	33	37	44	14	18 (24)	98	57	36	8	19	100	0.5	8-P211-010
8-211-012	1.2	M14	33	37	45	14	21 (24)	98	57	36	10	22	120	0.5	8-P211-012
8-211-015	1.5	M16	33	37	46	14	24 (29)	98	57	36	10	24	150	0.5	8-P211-015
8-211-020	2	M18	50	54	57	17	26 (31)	140	82	44	12	30	200	1.3	8-P211-020
8-211-025	2.5	M20	50	54	57	17	30 (36)	140	82	44	12	30	250	1.3	8-P211-025
8-211-040	4	M24	50	54	59	17	36 (41)	140	82	44	14	36	400	1.4	8-P211-040
8-211-042	4	M27	60	65	79	23	38 (48)	170	99	62	17	41	400	2.8	8-P211-042
8-211-050	5	M30	60	65	81	23	48 (53)	170	99	62	17	46	500	3.1	8-P211-050
8-211-070	7	M36	60	65	88	23	54 (60)	178	99	65	22	55	700	3.3	8-P211-070
8-211-080	8	M36	77	85	101	27	62	225	124	78	22	55	800	5.8	8-P211-080
8-211-100	10	M42	77	85	104	27	72	225	124	78	24	65	1000	6.3	8-P211-100
8-211-150	15	M42	95	104	112	36	63 (64)	256	158	86	24	65	1500	10.8	8-P211-150
8-211-200	20	M48	95	104	120	36	72 (75)	259	158	90	27	75	2000	11.6	8-P211-200

★ Design Factor 4:1

** Bolt in GEOMET® finished on request


UNC Thread (8-212)

Item No.	Working Load Limit lbs*	Thread TPI	Dimensions (inch)										Torque in ft. lbs	N.W. lbs	Repair Kits
			A	B	C	D	E	F	G	H	S	SW			
8-212-010	2200	1/2 - 13UNC	1.30	1.46	1.73	0.53	0.75 (0.94)	3.86	2.24	1.42	5/16	3/4	73	1.1	8-P212-010
8-212-015	3300	5/8 - 11UNC	1.30	1.46	1.81	0.53	0.94 (1.14)	3.86	2.24	1.42	3/8	15/16	110	1.1	8-P212-015
8-212-020	5500	3/4 - 10UNC	1.97	2.13	2.2	0.65	1.10 (1.42)	5.51	3.23	1.73	1/2	1 1/8	185	2.9	8-P212-020
8-212-025	5500	7/8 - 9UNC	1.97	2.13	2.28	0.65	1.10 (1.42)	5.51	3.23	1.73	5/8	1 5/16	221	2.9	8-P212-025
8-212-040	8800	1 - 8UNC	1.97	2.13	2.34	0.65	1.61	5.51	3.23	1.73	5/8	1 1/2	295	3.1	8-P212-040
8-212-050	11000	1 1/4 - 7UNC	2.36	2.56	3.23	0.89	1.61 (2.09)	6.69	3.9	2.44	7/8	1 7/8	368	6.8	8-P212-050
8-212-080	17000	1 1/2 - 6UNC	3.03	3.35	4.01	1.04	2.25 (2.44)	8.86	4.88	3.07	1	2 1/4	585	12.8	8-P212-080
8-212-150	33000	1 3/4 - 5UNC	3.74	4.09	4.48	1.42	2.63 (2.72)	10.08	6.22	3.39	1	2 5/8	1107	24.0	8-P212-150
8-212-200	44000	2 - 4.5UNC	3.74	4.09	4.76	1.42	3.00 (3.15)	10.2	6.22	3.54	1 1/4	3	1476	25.5	8-P212-200

★ Design Factor 4:1

** Bolt in GEOMET® finished on request



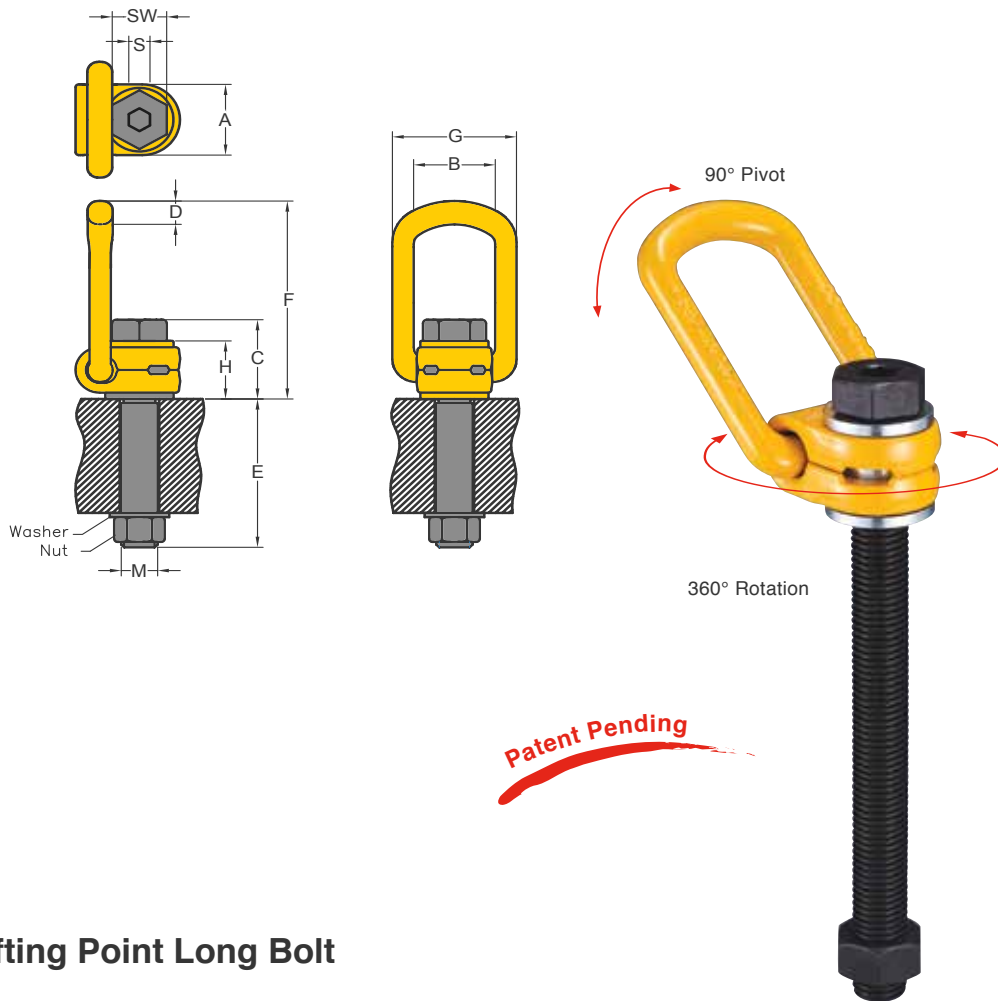


Lifting Point Long Bolt

Metric Thread

Item No.	Working Load Limit tonnes*	Thread M	Dimensions (mm)										Torque in Nm	N.W. kg	Repair Kits
			A	B	C	D	E	F	G	H	S	SW			
8-211-003/105L	0.3	M 8	30	35	35	10	76	85	55	29	6	13	30	0.3	8-P211-003/105L
8-211-006/125L	0.63	M10	30	35	36	10	96	85	55	29	6	17	60	0.3	8-P211-006/125L
8-211-010/150L	1	M12	33	37	44	14	114	98	57	36	8	19	100	0.5	8-P211-010/150L
8-211-015/185L	1.5	M16	33	37	46	14	149	98	57	36	10	24	150	0.5	8-P211-015/185L
8-211-025/230L	2.5	M20	50	54	57	17	186	140	82	44	12	30	250	1.3	8-P211-025/230L
8-211-040/265L	4	M24	50	54	59	17	221	140	82	44	14	36	400	2.9	8-P211-040/265L
8-211-050/340L	5	M30	60	65	81	23	278	170	99	62	17	46	500	3.2	8-P211-050/340L
8-211-080/300L	8	M36	77	85	101	27	222	225	124	78	22	55	800	5.8	8-P211-080/300L
8-211-100/350L	10	M42	77	85	104	27	272	225	124	78	24	65	1000	6.2	8-P211-100/350L
8-211-150/350L	15	M42	95	104	112	36	264	256	158	86	24	65	1500	11.0	8-P211-150/350L
8-211-200/385L	20	M48	95	104	120	36	295	259	158	90	27	75	2000	11.6	8-P211-200/385L

★ Design Factor 4:1

** Bolt in GEOMET[®] finished on request

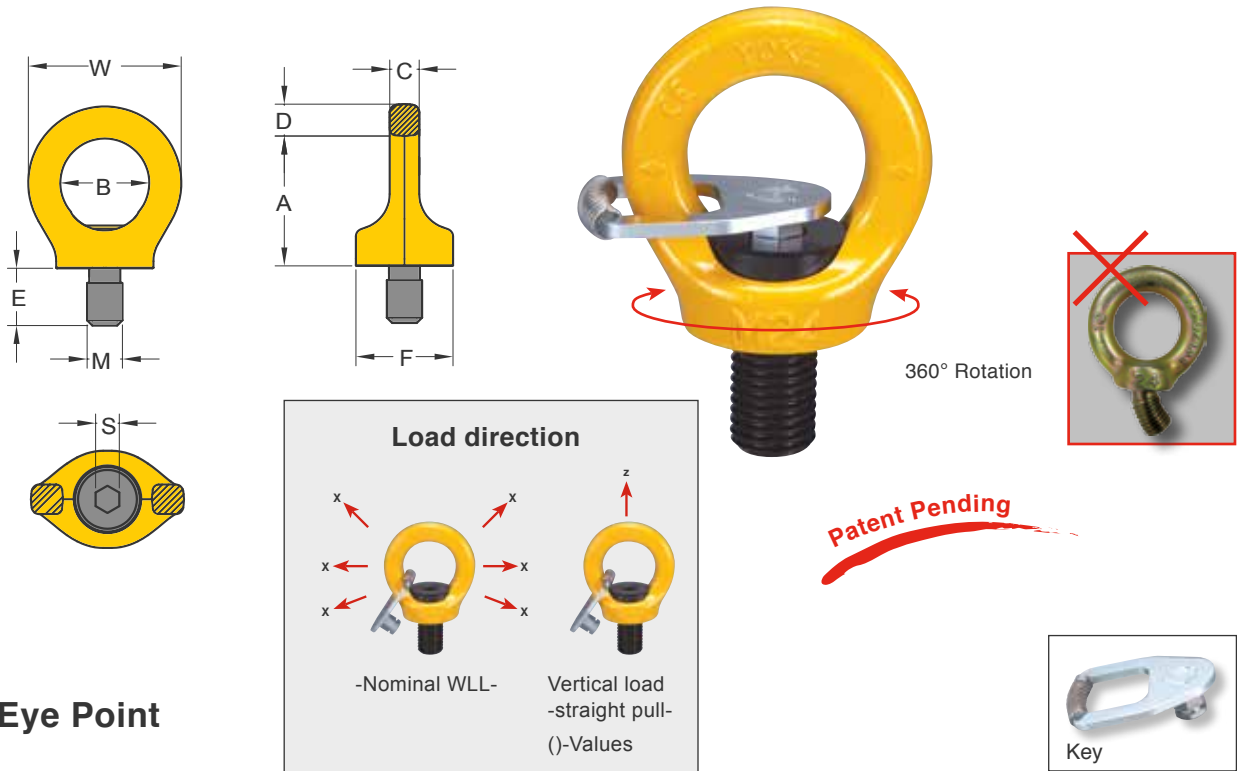

Key Eye Point

Metric Thread (8-291K)

Item No.	Working Load Limit	Thread	Dimensions (mm)								N.W.	Key	
	tonnes*		M	A	B	C	D	E	F	S			W
	x (z)												
8-291K-003	0.3 (1)	M 8	36	25	8	11	12	25	6	44	0.1	8-P291K-004	
8-291K-004	0.4 (1)	M10	36	25	8	11	15	25	6	44	0.1	8-P291K-004	
8-291K-007	0.75 (2)	M12	42	30	10	13	18	33	8	52	0.2	8-P291K-007	
8-291K-015	1.5 (4)	M16	51	35	14	13	24	35	10	61	0.3	8-P291K-015	
8-291K-023	2.3 (6)	M20	57	40	16	17	30	44	12	70	0.6	8-P291K-023	
8-291K-032	3.2 (8)	M24	70	48	19	21	36	52	14	84	1.0	8-P291K-032	
8-291K-045	4.5 (12)	M30	86	60	24	26	45	62	17	108	1.8	8-P291K-045	
8-291K-070	7.0 (16)	M36	103	72	29	32	54	78	22	130	3.2	8-P291K-070	
8-291K-090	9.0 (24)	M42	120	82	34	38	63	88	24	150	5.0	8-P291K-090	
8-291K-120	12.0 (32)	M48	137	94	38	43	72	104	27	168	7.6	8-P291K-120	
8-291K-140	12.0 (32)	M56	147	102	40	43	84	124	27	178	9.7	8-P291K-150	
8-291K-150	12.0 (32)	M64	147	102	40	43	95	124	27	178	10.5	8-P291K-150	

★ Design Factor 4:1

** Bolt in GEOMET® finished on request


UNC Thread (8-292K)

Item No.	Working Load Limit	Thread	Dimensions (inch)								N.W.	Key	
	lbs*		TPI	A	B	C	D	E	F	S			W
	x (z)												
8-292K-003	660 (2200)	5/16 - 18UNC	1.42	0.98	0.33	0.43	0.47	0.98	0.26	1.73	0.2	8-P292K-004	
8-292K-004	880 (2200)	3/8 - 16UNC	1.42	0.98	0.33	0.43	0.57	0.98	0.26	1.73	0.2	8-P292K-004	
8-292K-007	1650 (4400)	1/2 - 13UNC	1.65	1.18	0.39	0.51	0.75	1.30	0.31	2.05	0.4	8-P292K-007	
8-292K-015	3300 (8800)	5/8 - 11UNC	2.01	1.38	0.55	0.51	0.94	1.38	0.37	2.40	0.7	8-P292K-015	
8-292K-023	5060 (13200)	3/4 - 10UNC	2.24	1.57	0.63	0.67	1.13	1.73	0.50	2.76	1.3	8-P292K-023	
8-292K-025	5060 (13200)	7/ 8 - 9UNC	2.24	1.57	0.63	0.67	1.31	1.73	0.50	2.76	1.3	8-P292K-025	
8-292K-032	7040 (17600)	1 - 8UNC	2.76	1.89	0.75	0.83	1.50	2.05	0.56	3.31	2.2	8-P292K-032	
8-292K-045	9900 (26400)	1 1/4 - 7UNC	3.39	2.36	0.94	1.02	1.88	2.44	0.75	4.25	4.0	8-P292K-045	
8-292K-070	15400 (35200)	1 1/2 - 6UNC	4.06	2.83	1.14	1.26	2.25	3.07	0.87	5.12	7.0	8-P292K-070	
8-292K-090	19800 (52800)	1 3/4 - 5UNC	4.72	3.23	1.34	1.50	2.63	3.46	1.00	5.91	11.0	8-P292K-090	
8-292K-120	26400 (70400)	2 - 4.5UNC	5.39	3.70	1.50	1.69	3.00	4.09	1.00	6.61	16.7	8-P292K-120	

★ Design Factor 4:1

** Bolt in GEOMET® finished on request



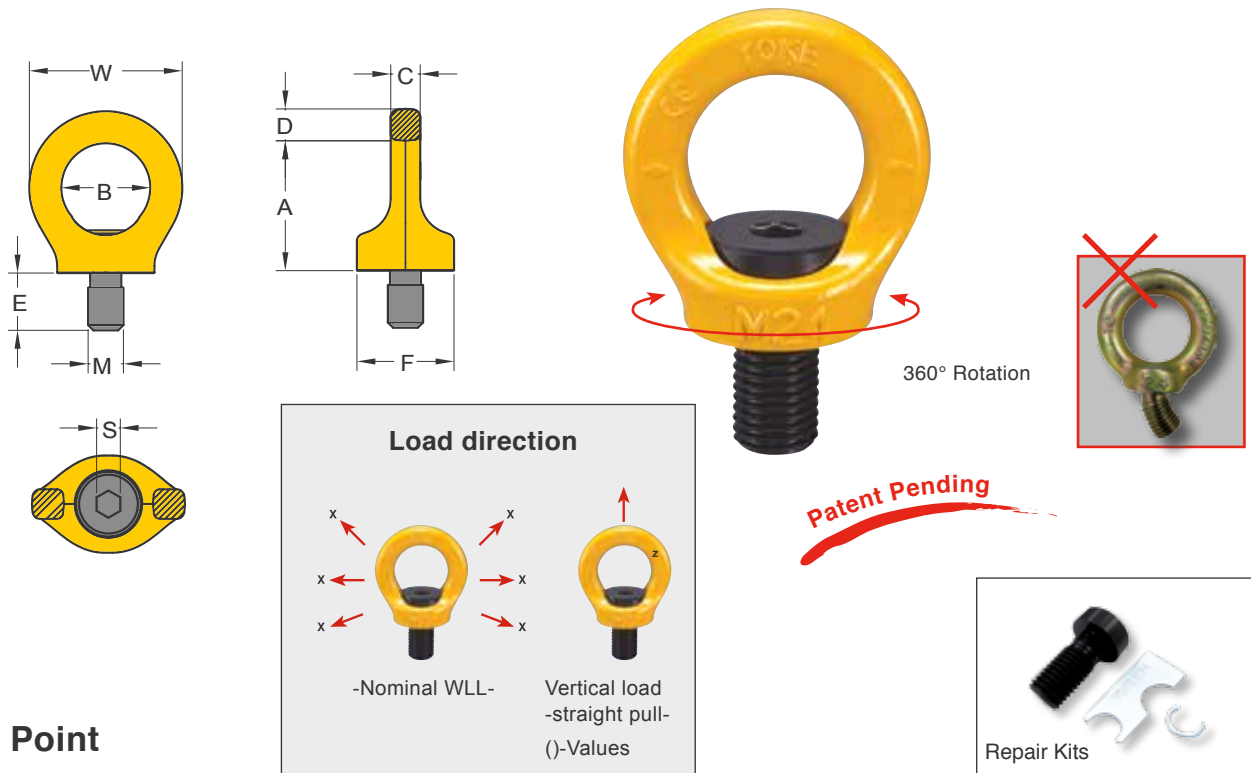

Eye Point

Metric Thread (8-291)

Item No.	Working Load Limit	Thread	Dimensions (mm)								N.W. kg	Repair Kits	
	tonnes*		M	A	B	C	D	E	F	S			W
	x (z)												
8-291-003	0.3 (1)	M 8	36	25	8	11	12	25	6	44	0.1	8-P291-003	
8-291-004	0.4 (1)	M10	36	25	8	11	15	25	6	44	0.1	8-P291-004	
8-291-007	0.75 (2)	M12	42	30	10	13	18	33	8	52	0.2	8-P291-007	
8-291-015	1.5 (4)	M16	51	35	14	13	24	35	10	61	0.3	8-P291-015	
8-291-023	2.3 (6)	M20	57	40	16	17	30	44	12	70	0.5	8-P291-023	
8-291-032	3.2 (8)	M24	70	48	19	21	36	52	14	84	0.9	8-P291-032	
8-291-045	4.5 (12)	M30	86	60	24	26	45	62	17	108	1.7	8-P291-045	
8-291-070	7.0 (16)	M36	103	72	29	32	54	78	22	130	2.9	8-P291-070	
8-291-090	9.0 (24)	M42	120	82	34	38	63	88	24	150	4.6	8-P291-090	
8-291-120	12.0 (32)	M48	137	94	38	43	72	104	27	168	7.0	8-P291-120	
8-291-140	12.0 (32)	M56	147	102	40	43	84	124	27	178	9.7	8-P291K-150	
8-291-150	12.0 (32)	M64	147	102	40	43	95	124	27	178	10.5	8-P291K-150	

★ Design Factor 4:1



** Bolt in GEOMET[®] finished on request

UNC Thread (8-292)

Item No.	Working Load Limit	Thread	Dimensions (inch)								N.W. lbs	Repair Kits
	lbs*		TPI	A	B	C	D	E	F	S		
	x (z)											
8-292-003	660 (2200)	5/16 - 18UNC	1.42	0.98	0.33	0.43	0.47	0.98	0.26	1.73	0.2	8-P292-003
8-292-004	880 (2200)	3/8 - 16UNC	1.42	0.98	0.33	0.43	0.57	0.98	0.26	1.73	0.2	8-P292-004
8-292-007	1650 (4400)	1/2 - 13UNC	1.65	1.18	0.39	0.51	0.75	1.30	0.31	2.05	0.4	8-P292-007
8-292-015	3300 (8800)	5/8 - 11UNC	2.01	1.38	0.55	0.51	0.94	1.38	0.37	2.40	0.7	8-P292-015
8-292-023	5060 (13200)	3/4 - 10UNC	2.24	1.57	0.63	0.67	1.13	1.73	0.50	2.76	1.1	8-P292-023
8-292-025	5060 (13200)	7/8 - 9UNC	2.24	1.57	0.63	0.67	1.31	1.73	0.50	2.76	1.1	8-P292-025
8-292-032	7040 (17600)	1 - 8UNC	2.76	1.89	0.75	0.83	1.50	2.05	0.56	3.31	2.0	8-P292-032
8-292-045	9900 (26400)	1 1/4 - 7UNC	3.39	2.36	0.94	1.02	1.88	2.44	0.75	4.25	3.7	8-P292-045
8-292-070	15400 (35200)	1 1/2 - 6UNC	4.06	2.83	1.14	1.26	2.25	3.07	0.87	5.12	6.4	8-P292-070
8-292-090	19800 (52800)	1 3/4 - 5UNC	4.72	3.23	1.34	1.50	2.63	3.46	1.00	5.91	10.1	8-P292-090
8-292-120	26400 (70400)	2 - 4.5UNC	5.39	3.70	1.50	1.69	3.00	4.09	1.00	6.61	15.4	8-P292-120

★ Design Factor 4:1

** Bolt in GEOMET[®] finished on request

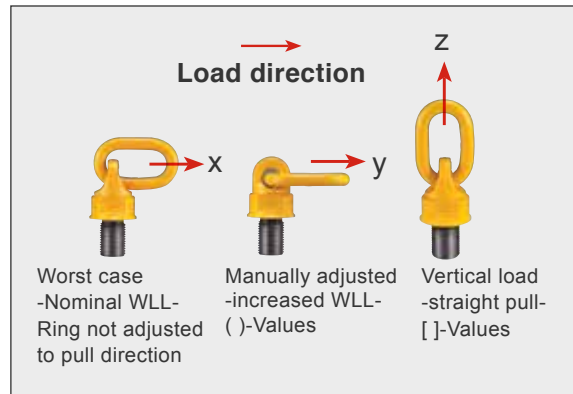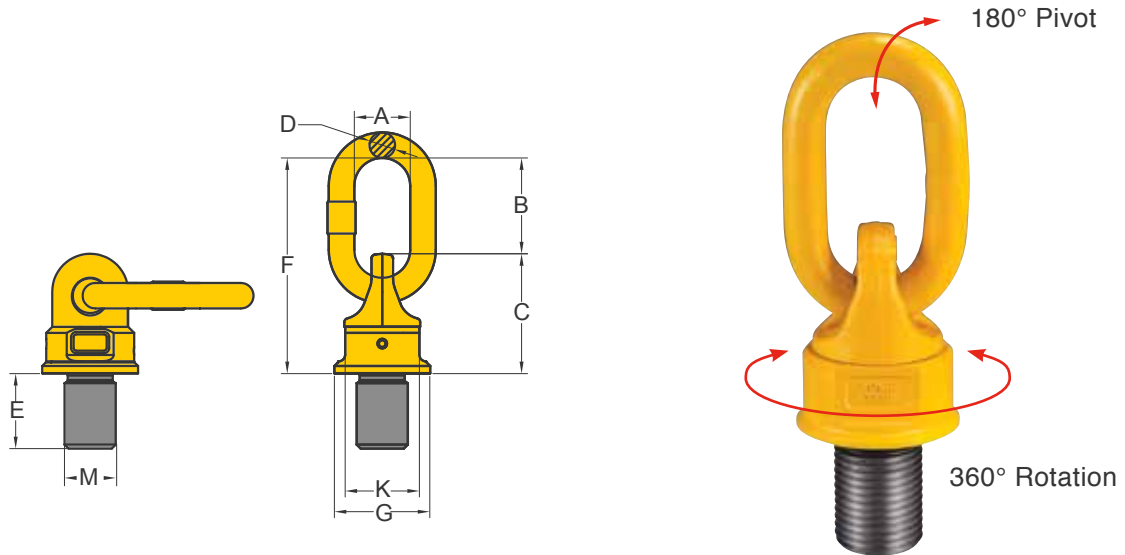



Swivel Point

Metric Thread (8-271)

Item No.	Working Load Limit	Thread	Dimensions (mm)								N.W. kg	
	tonnes*		M	A	B	C	D	E	F	G		K
	x (y) [z]											
	→											
8-271-003	0.3 (0.4) [0.6]	M 8	29	32	40	8	12	72	35	30	0.2	
8-271-004	0.45 (0.6) [0.9]	M10	29	32	40	8	15	72	35	30	0.3	
8-271-006	0.6 (0.7) [1.2]	M12	35	50	45	10	18	95	40	36	0.84	
8-271-013	1.3 (1.5) [2.6]	M16	38	50	54	13	24	104	46	41	1.3	
8-271-020	2 (2.5) [4]	M20	38	54	68	13	30	122	62	55	1.4	
8-271-035	3.5 (4) [7]	M24	40	66	88	19	36	154	78	70	2.6	
8-271-060	5 (6) [10]	M30	50	86	120	22	55	206	90	80	4.9	
8-271-080	8 (10) [15]	M36	50	86	120	22	55	206	90	80	5.0	
8-271-120	12 (13) [17]	M42	65	110	122	25	64	235	98	84	5.5	
8-271-130	13 (16) [18]	M48	65	110	122	25	73	235	98	84	5.8	
8-271-140	14 (20) [25]	M52	70	120	150	32	79	270	120	94	10.5	
8-271-160	16 (22) [28]	M56	70	120	150	32	85	270	120	94	10.7	
8-271-161	16 (25) [28]	M64	70	120	150	32	95	270	120	94	11.6	
8-271-310	31.5 (40) [50]	M72	90	130	210	45	108	340	170	145	30.6	
8-271-350	35 (48) [50]	M80	90	130	210	45	120	340	170	145	31.9	
8-271-400	40 (50) [50]	M90	90	130	210	45	135	340	170	145	33.9	

★ Design Factor 4:1

※ Thread M33, M39, M45, up to M150 are available upon request

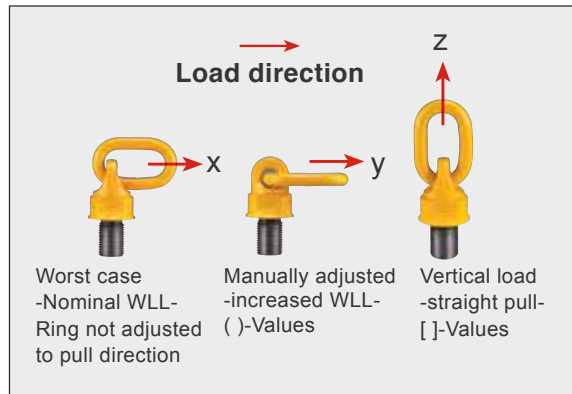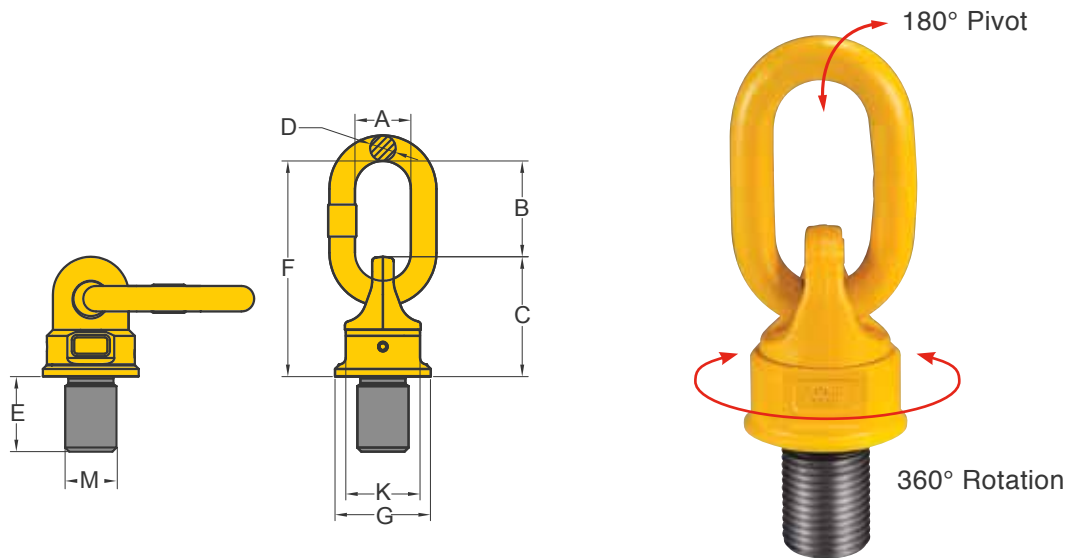



Swivel Point

UNC Thread (8-272)

Item No.	Working Load Limit	Thread	Dimensions (inch)								N.W. lbs		
	lbs*		TPI		A	B	C	D	E	F		G	K
	x (y) [z]												
8-272-006	660 (880) [1320]	1/2 - 13UNC	1.38	1.97	1.77	0.39	0.75	4.09	1.57	1.42	0.9		
8-272-013	2860 (3300) [5720]	5/8 - 11UNC	1.50	1.97	2.13	0.51	0.94	4.49	1.81	1.61	1.3		
8-272-018	3960 (4400) [7900]	3/4 - 10UNC	1.50	1.97	2.68	0.51	1.13	4.49	1.81	1.61	3.1		
8-272-020	4400 (5500) [8800]	7/8 - 9UNC	1.50	2.20	2.68	0.51	1.31	5.31	2.44	2.17	3.1		
8-272-035	7700 (8800) [15400]	1 - 8UNC	1.57	2.68	3.46	0.71	1.50	6.77	3.07	2.76	5.7		
8-272-060	13200 (16500) [22000]	1 1/4 - 7UNC	1.97	3.39	4.72	0.87	1.88	8.15	3.54	3.15	10.8		
8-272-080	17600 (22000) [33000]	1 1/2 - 6UNC	1.97	3.39	4.72	0.87	2.25	8.15	3.54	3.15	11.0		
8-272-120	26400 (28600) [37400]	1 3/4 - 5UNC	2.56	3.54	4.80	1.02	2.63	8.23	3.86	3.31	12.1		
8-272-130	28600 (35200) [39600]	2 - 4.5UNC	2.56	3.54	4.80	1.02	3.00	8.23	3.86	3.31	12.8		
8-272-140	30800 (48400) [55000]	2 1/4 - 4.5UNC	2.56	3.54	5.91	1.02	3.38	8.23	3.86	3.31	23.1		
8-272-160	35200 (48400) [61600]	2 1/2 - 4UNC	2.76	4.72	5.91	1.26	3.75	10.63	4.72	3.70	23.5		
8-272-310	69300 (88000) [110000]	3 - 4UNC	3.54	5.12	8.27	1.81	4.50	13.39	6.69	5.71	67.3		
8-272-350	77000 (105600) [110000]	3 1/2 - 4UNC	3.54	5.12	8.27	1.81	5.25	13.39	6.69	5.71	70.2		
8-272-400	88000 (110000) [110000]	4 - 4UNC	3.54	5.12	8.27	1.81	6.00	13.39	6.69	5.71	74.6		

★ Design Factor 4:1

※ Thread up to 6" are available upon request

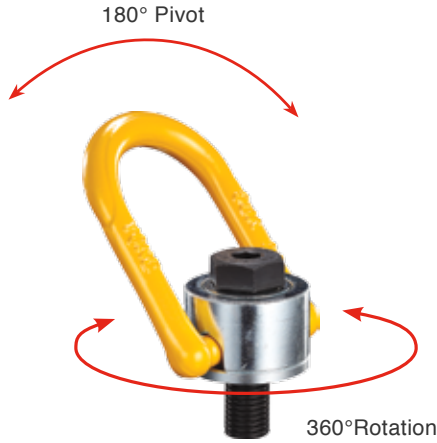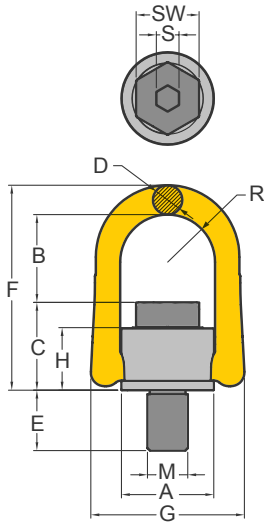

Patent Pending



Anchor Point

Metric Thread (8-231)

Item No.	Working Load Limit		Thread	Dimensions (mm)											Torque in Nm	N.W. kg	Repair Kits	
	tonnes*			M	A	B	C	D	E	F	G	H	R	S				SW
	5:1	4:1																
8-231-005	0.4	0.5	M8	33	42	28	11	12	80	58	23	17	6	13	30	0.3	8-P231-005	
8-231-007	0.56	0.7	M10	33	41	29	11	15	80	58	23	17	6	17	60	0.3	8-P231-007	
8-231-010	0.8	1.0	M12	33	40	31	11	18	80	58	23	17	8	19	100	0.3	8-P231-010	
8-231-015	1.2	1.5	M14	51	56	45	17	21	117	90	36	27	10	22	120	0.9	8-P231-015	
8-231-020	1.6	2.0	M16	51	54	46	17	24	117	90	36	27	10	24	150	0.9	8-P231-020	
8-231-025	2.0	2.5	M18	65	78	57	20	27	153	108	44	34	12	30	200	1.9	8-P231-025	
8-231-030	2.4	3.0	M20	51	52	49	17	30	117	90	36	27	12	30	250	1.0	8-P231-030	
8-231-050	4.0	5.0	M24	72	81	59	22	36	162	125	44	37	14	36	400	2.6	8-P231-050	
8-231-056	4.5	5.6	M27	87	96	79	30	38	205	148	62	46	17	41	400	4.9	8-P231-056	
8-231-078	6.25	7.8	M30	87	94	81	30	48	205	148	62	46	17	46	500	5.0	8-P231-078	
8-231-125	10.0	12.5	M36	110	112	98	38	54	246	188	75	57	22	55	1000	9.6	8-P231-125	
8-231-156	12.5	15.6	M42	110	101	109	38	63	246	188	83	57	24	65	1500	10.9	8-P231-156	
8-231-200	16.0	20.0	M48	110	97	113	38	72	246	188	83	57	27	75	2000	11.6	8-P231-200	
8-231-220	17.6	22.0	M56	123	113	123	38	84	273	202	91	64	—	85	2100	15.0	8-P231-220	
8-231-225	18.0	22.5	M64	123	112	124	38	96	273	202	91	64	—	95	2200	16.3	8-P231-225	

* Proof Load is 2.5 times the Working Load Limit on the 4:1 design factor.

** Bolt in GEOMET[®] finished on request


UNC Thread (8-232)

Item No.	Working Load Limit		Thread	Dimensions (inch)											Torque in ft. lbs	N.W. lbs	Repair Kits	
	lbs*			TPI	A	B	C	D	E	F	G	H	R	S				SW
	5:1	4:1																
8-232-010	1700	1700	1/2 - 13 UNC	1.97	2.23	1.73	0.65	0.75	4.61	3.54	1.42	1.06	5/16	3/4	73	1.8	8-P232-010	
8-232-020	3500	3500	5/8 - 11 UNC	1.97	2.13	1.81	0.65	0.94	4.61	3.54	1.42	1.06	3/8	15/16	110	2.0	8-P232-020	
8-232-030	5300	5300	3/4 - 10 UNC	1.97	2.07	1.89	0.65	1.10	4.61	3.54	1.42	1.06	1/2	1 1/8	185	2.2	8-P232-030	
8-232-038	6700	6700	7/8 - 9 UNC	2.56	2.99	2.28	0.79	1.10	6.02	4.25	1.73	1.34	5/8	1 5/16	221	4.3	8-P232-038	
8-232-050	8800	8800	1 - 8 UNC	2.81	3.17	2.34	0.87	1.61	6.38	4.92	1.73	1.46	7/8	1 1/2	295	5.7	8-P232-050	
8-232-078	13700	13700	1 1/4 - 7 UNC	3.43	3.66	3.23	1.18	1.61	8.07	5.83	2.44	1.79	7/8	1 7/8	368	11.0	8-P232-078	
8-232-125	22000	22000	1 1/2 - 6 UNC	4.29	4.38	3.87	1.50	2.39	9.69	7.40	2.93	2.22	1	2 1/4	585	21.2	8-P232-125	
8-232-200	35200	35200	2 - 4.5 UNC	4.29	3.80	4.46	1.50	3.00	9.69	7.40	3.25	2.22	1 1/4	3	1476	25.6	8-P232-200	

★ Design Factor 5:1

** Bolt in GEOMET[®] finished on request



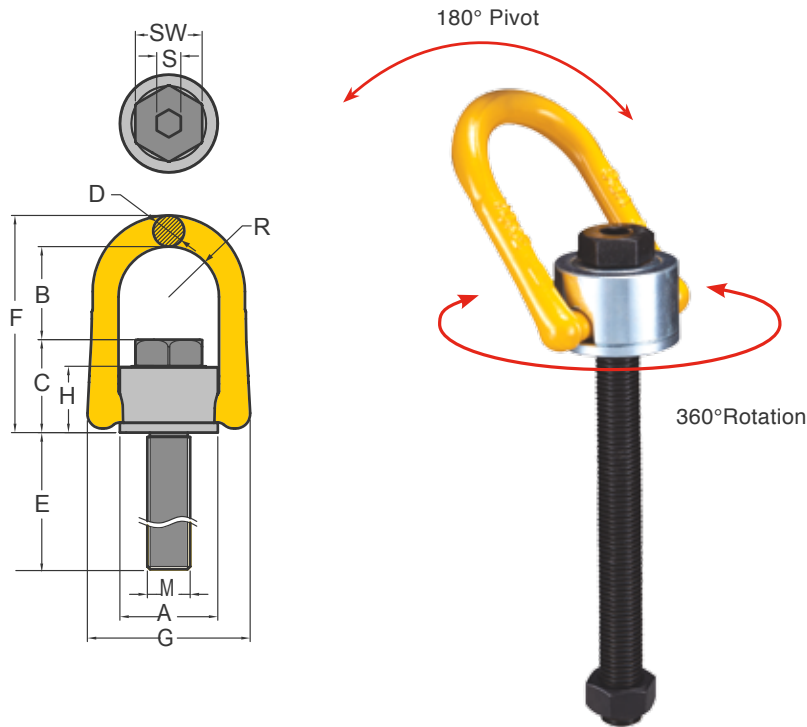

Patent Pending



Repair Kits


Anchor Point Long Bolt

Metric Thread

Item No.	Working Load Limit		Thread	Dimensions (mm)										Torque in Nm	N.W. kg	Repair Kits		
	tonnes*			M	A	B	C	D	E	F	G	H	R				S	SW
	5:1	4:1																
8-231-005/105L	0.4	0.5	M8	32	42	28	11	83	80	58	23	17	6	13	30	0.3	8-P231-005/105L	
8-231-007/125L	0.56	0.7	M10	32	41	29	11	103	80	58	23	17	6	17	60	0.4	8-P231-007/125L	
8-231-010/150L	0.80	1	M12	32	40	31	11	128	80	58	23	17	8	19	100	0.4	8-P231-010/150L	
8-231-020/185L	1.6	2	M16	50	54	46	17	149	117	90	36	27	10	24	150	1.1	8-P231-020/185L	
8-231-030/230L	2.4	3	M20	50	52	49	17	194	117	90	36	27	12	30	250	1.4	8-P231-030/230L	
8-231-050/265L	4	5	M24	72	81	59	22	221	162	125	44	37	14	36	400	3.2	8-P231-050/265L	
8-231-078/340L	6.25	7.8	M30	87	94	81	30	278	205	148	62	46	17	46	500	6.3	8-P231-078/340L	
8-231-125/300L	10	12.5	M36	109	112	98	38	225	246	188	75	57	22	55	1000	10.9	8-P231-125/300L	
8-231-156/350L	12.5	15.6	M42	109	101	109	38	268	246	188	83	57	24	65	1500	13.9	8-P231-156/350L	
8-231-200/385L	16	20	M48	109	97	113	38	303	246	188	83	57	27	75	2000	14.7	8-P231-200/385L	

* Proof Load is 2.5 times the Working Load Limit on the 4:1 design factor.

** Bolt in GEOMET® finished on request

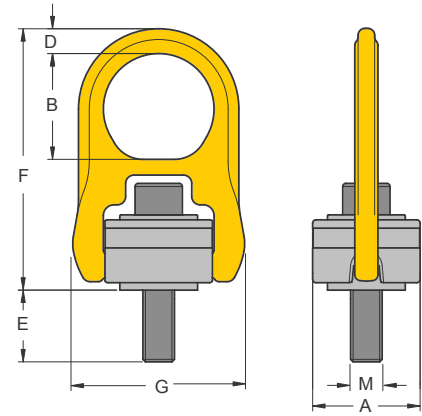

Hoist Ring

with Alloy Steel Washer

Metric Thread (8-203)

Item No.	Working Load Limit		Thread	Dimensions (mm)						Torque in Nm	N.W. kg
	tonnes*	4 : 1		M	A	B	D	E	F		
	5 : 1	4 : 1									
8-203-004	0.40	0.50	M 8	40	41	9	17	102	65	10	0.4
8-203-005	0.45	0.55	M10	40	41	9	11	102	65	16	0.5
§ 8-203-005L	0.45	0.55	M10	40	41	9	26	102	65	16	0.5
8-203-010	1.05	1.30	M12	65	64	15	15	158	105	38	1.7
§ 8-203-010L	1.05	1.30	M12	65	64	15	30	158	105	38	1.7
8-203-019	1.90	2.40	M16	65	64	15	20	158	105	81	1.8
§ 8-203-019L	1.90	2.40	M16	65	64	15	35	158	105	81	1.8
8-203-021	2.15	2.70	M20	65	64	15	25	158	105	136	1.8
§ 8-203-021L	2.15	2.70	M20	65	64	15	45	158	105	136	1.9
8-203-030	3.00	3.75	M20	85	79	19	25	204	134	136	4.0
§ 8-203-030L	3.00	3.75	M20	85	79	19	45	204	134	136	5.2
8-203-042	4.20	5.25	M24	85	79	19	26	204	134	312	4.2
§ 8-203-042L	4.20	5.25	M24	85	79	19	56	204	134	312	4.3
8-203-070	7.00	8.75	M30	100	100	25	81	241	160	637	6.6
8-203-110	11.00	13.75	M36	120	111	30	76	286	194	1005	15.0
8-203-125	12.50	15.60	M42	120	111	30	95	286	220	1005	16.0
8-203-135	13.50	16.90	M48	120	111	30	105	286	220	1350	16.0
8-203-155	15.50	19.40	M56	138	109	34	94	308	241	1350	19.1
8-203-223	22.30	27.90	M64	138	100	38	98	312	241	2847	23.0

* Proof Load is 2.5 times the Working Load Limit on the 4:1 design factor.

** Bolt in GEOMET® finished on request

§ Long Bolts are designed for soft metal work piece.

UNC thread (8-204)


Item No.	Working Load Limit		Thread	Dimensions (mm)						Torque in ft. lbs	N.W. lbs
	lbs*	5 : 1		A	B	D	E	F	G		
8-204-004	800		5/16 - 18UNC	1.57	1.61	0.35	0.71	4.02	2.56	7	0.9
8-204-005	1000		3/8 - 16UNC	1.57	1.61	0.35	0.71	4.02	2.56	12	0.9
8-204-010	2500		1/2 - 13UNC	2.56	2.32	0.59	0.75	6.26	4.13	28	3.7
§ 8-204-010L	2500		1/2 - 13UNC	2.56	2.32	0.59	1.26	6.26	4.13	28	3.7
8-204-019	4000		5/8 - 11UNC	2.56	2.32	0.59	0.74	6.26	4.13	60	4.0
§ 8-204-019L	4000		5/8 - 11UNC	2.56	2.32	0.59	1.75	6.26	4.13	60	4.0
8-204-021	5000		3/4 - 10UNC	2.56	2.87	0.59	1.24	6.26	4.13	100	4.0
§ 8-204-021L	5000		3/4 - 10UNC	2.56	2.87	0.59	1.73	6.26	4.13	100	4.2
8-204-030	7000		3/4 - 10UNC	3.35	2.87	0.59	0.87	6.26	5.28	100	8.8
§ 8-204-030L	7000		3/4 - 10UNC	3.35	2.87	0.87	1.87	8.03	5.28	100	9.5
8-204-042	8000		7/8 - 9UNC	3.35	2.87	0.87	1.43	8.03	5.28	160	9.3
§ 8-204-042L	8000		7/8 - 9UNC	3.35	2.87	0.87	2.37	8.03	5.28	160	9.7
8-204-045	10000		1 - 8UNC	3.35	2.87	0.87	1.36	8.03	5.28	230	9.5
§ 8-204-045L	10000		1 - 8UNC	3.35	2.87	0.87	2.36	8.03	5.28	230	10.1
8-204-070	15000		1 1/4 - 7UNC	3.95	3.15	1.00	2.22	8.58	6.30	470	14.5
8-204-125	24000		1 1/2 - 6UNC	4.72	4.29	1.38	3.15	12.09	8.66	800	35.2
8-204-135	30000		2 - 4.5UNC	4.72	4.29	1.38	3.17	12.09	8.66	1100	35.2

★ Design Factor 5:1

§ Long Bolts are designed for soft metal work piece.

** Bolt in GEOMET® finished on request



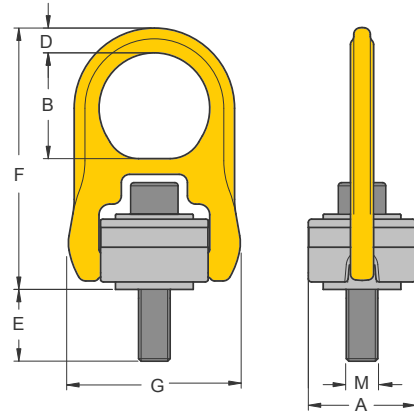

**Ball Bearing Inside
Patent**

Hoist Ring

with Ball Bearing

Metric Thread (8-201)

Item No.	Working Load Limit		Bolt Size	Dimensions (mm)						Torque in Nm	N.W. kg
	tonnes*			A	B	D	E	F	G		
	5 : 1	4 : 1									
8-201-004	0.40	0.50	M 8	40	41	9	16.5	102	65	10	0.4
8-201-005	0.45	0.55	M10	40	41	9	11.5	102	65	16	0.4
§ 8-201-005L	0.45	0.55	M10	40	41	9	26.5	102	65	16	0.5
8-201-010	1.05	1.30	M12	65	64	15	14.0	158	105	38	1.7
§ 8-201-010L	1.05	1.30	M12	65	64	15	29.0	158	105	38	2.1
8-201-019	1.90	2.40	M16	65	64	15	19.0	158	105	81	1.7
§ 8-201-019L	1.90	2.40	M16	65	64	15	34.0	158	105	81	1.8
8-201-021	2.15	2.70	M20	65	64	15	24.0	158	105	136	1.8
§ 8-201-021L	2.15	2.70	M20	65	64	15	44.0	158	105	136	1.8
8-201-030	3.00	3.75	M20	85	79	19	25.0	204	134	136	4.1
§ 8-201-030L	3.00	3.75	M20	85	79	19	45.0	204	134	136	4.2
8-201-042	4.20	5.25	M24	85	79	19	25.0	204	134	312	4.2
§ 8-201-042L	4.20	5.25	M24	85	79	19	50.0	204	134	312	4.3

* Proof Load is 2.5 times the Working Load Limit on the 4:1 design factor.

** Bolt in GEOMET® finished on request

§ Long Bolts are designed for soft metal work piece.



UNC thread (8-202)

Item No.	Working Load Limit		Thread	Dimensions (mm)						Torque in ft. lbs	N.W. lbs
	lbs*			A	B	D	E	F	G		
		TPI									
8-202-004	800	5/16 - 18UNC	1.57	1.61	0.35	0.71	4.02	2.56	7	0.9	
8-202-005	1000	3/8 - 16UNC	1.57	1.61	0.35	0.71	4.02	2.56	12	0.9	
8-202-010	2500	1/2 - 13UNC	2.56	2.32	0.59	1.07	6.26	4.13	28	3.7	
§ 8-202-010L	2500	1/2 - 13UNC	2.56	2.32	0.59	1.26	6.26	4.13	28	4.1	
8-202-019	4000	5/8 - 11UNC	2.56	2.32	0.59	0.74	6.26	4.13	60	3.7	
§ 8-202-019L	4000	5/8 - 11UNC	2.56	2.32	0.59	1.75	6.26	4.13	60	4.0	
8-202-021	5000	3/4 - 10UNC	2.56	2.87	0.59	1.24	6.26	4.13	100	4.0	
§ 8-202-021L	5000	3/4 - 10UNC	2.56	2.87	0.59	1.73	6.26	4.13	100	4.0	
8-202-030	7000	3/4 - 10UNC	3.35	2.87	0.59	0.87	6.26	5.28	100	9.0	
§ 8-202-030L	7000	3/4 - 10UNC	3.35	2.87	0.87	1.87	8.03	5.28	100	9.0	
8-202-042	8000	7/8 - 9UNC	3.35	2.87	0.87	1.43	8.03	5.28	160	9.2	
§ 8-202-042L	8000	7/8 - 9UNC	3.35	2.87	0.87	2.37	8.03	5.28	160	9.5	
8-202-045	10000	1 - 8UNC	3.35	2.87	0.87	1.36	8.03	5.28	230	9.3	
§ 8-202-045L	10000	1 - 8UNC	3.35	2.87	0.87	2.36	8.03	5.28	230	9.7	

★ Design Factor 5:1

§ Long Bolts are designed for soft metal work piece.

** Bolt in GEOMET® finished on request

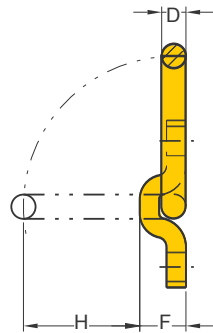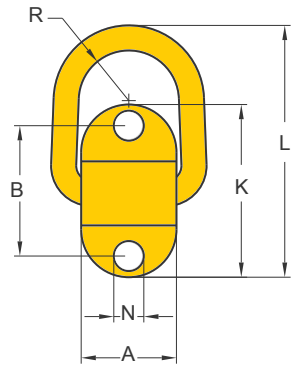

Bolt-on Tie Down. Code “DAB” .













Designed with spring, stop at any angle
supplied without bolt

Item No.	Working Load Limit tonnes*	Dimensions (mm)									N.W. kg
		A	B	D	F	H	K	L	N	R	
8-058-1T	1.0	50	72	14	27	55	98	139	14	24	0.7
8-058-3T	3.0	58	84	17	33	50	114	144	16	29	1.1
8-058-5T	5.0	64	116	22	43	74	160	203	20	33	2.5

★ Design factor 5:1
Bolts of grade 10.9 & 12.9 are recommended

Weld-on Lifting Points



		8-0573 Economic Point	8-057 Weld-on Point	8-082 Weld-on Ring	8-081 Weld-on Hook																					
																										
Number of legs	Load direction	Item No.																								
		8-0573-01	8-0573-03	8-0573-05	8-0573-08	8-0573-10	8-0573-20	8-0573-30	8-057-1T	8-057-3T	8-057-5T	8-057-8T	8-057-10T	8-082-04	8-082-06	8-082-10	8-082-16	8-082-30	8-081-01	8-081-02	8-081-03	8-081-04	8-081-05	8-081-08	8-081-10	8-081-15
	1 0°	1	3	5	8	10	20	30	1	3	5	8	10	4	6.7	10	16	31.5	1	2	3	4	5	8	10	15
	2 0°	2	6	10	16	20	40	60	2	6	10	16	20	8	13.4	20	32	63	2	4	6	8	10	16	20	30
	1 90°	1	3	5	8	10	20	30	1	3	5	8	10	4	6.7	10	16	31.5	1	2	3	4	5	8	10	15
	2 90°	2	6	10	16	20	40	60	2	6	10	16	20	8	13.4	20	32	63	2	4	6	8	10	16	20	30
	2 0-45°	1.4	4.2	7	11.2	14	28	42	1.4	4.2	7	11.2	14	5.6	9.4	14	22.4	44.1	1.4	2.8	4.2	5.6	7	11.2	14	21
	2 45-60°	1	3	5	8	10	20	30	1	3	5	8	10	4	6.7	10	16	31.5	1	2	3	4	5	8	10	15
	2 unsymm.	1	3	5	8	10	20	30	1	3	5	8	10	4	6.7	10	16	31.5	1	2	3	4	5	8	10	15
	3-4 0-45°	2.1	6.3	10.5	16.8	21	42	63	2.1	6.3	10.5	16.8	21	8.4	14.1	21	33.6	66.2	2.1	4.2	6.3	8.4	10.5	16.8	21	31.5
	3-4 45-60°	1.5	4.5	7.5	12	15	30	45	1.5	4.5	7.5	12	15	6	10.1	15	24	47.3	1.5	3	4.5	6	7.5	12	15	22.5
	3-4 unsymm.	1	3	5	8	10	20	30	1	3	5	8	10	4	6.7	10	16	31.5	1	2	3	4	5	8	10	15



WELDING INSTRUCTIONS

The welding should only be carried out by qualified welder according to Standards, e.g. EN 287 or AWS.

Support material

- Material of the welding block is S355J2+N (1.0577+N, St 52-3N, B.S. 4360.50D, AISI 1019 etc.).
- Prior to welding, the contact areas must be free from impurities, oil, paint, rust, scale, etc., for example by grinding. If the surface is at all corroded, all rust must be completely removed from the weld area. Painted surface must be prepared in the same way.
- The steel support member must have a carbon content of no more than 0.40%.
- In ambient temperature of 10°C and below, pre-heating of the weld area prior to welding must be carried out.

Seam welding


- The welds must be sufficiently strong to take the required loads.
- Before starting the final weld pass, clean well the root pass to avoid inclusions.
- The complete welding operation must be carried out continuously so that the parts do not have time to cool.
- Effects of temperature
 - The complete construction can be annealed stress release at <600°C without reduction of WLL.
 - Do not rapidly cool the weld.
- A thorough inspection of the weld should be performed. No cracks, pitting, inclusions, notches or undercuts are allowed. If doubt exists, use a suitable NDT method, such as magnetic particle or liquid penetrant to verify.
- If repair is required, grind out the defect and re-weld using the original qualified procedure.

Welding materials


- Weld materials must have a minimum tensile strength of 70,000 PSI (such as AWS A5.1 E-7018), following the electrode manufacturer's recommendations. Reference information as below:

MIG arc welding:

- Wire diameter 0.8 - 1.2 as per DIN 8559-SG 3, AWS A 5.18.
- Important: do not weld in the open air during bad weather

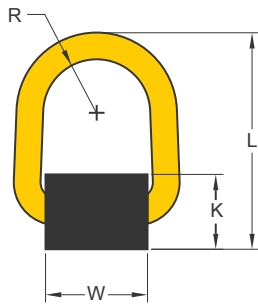


Economic Type

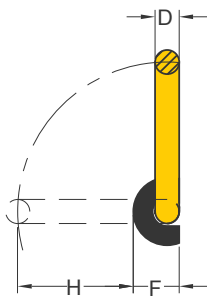

Economic Point




Economic Type without Spring Inside

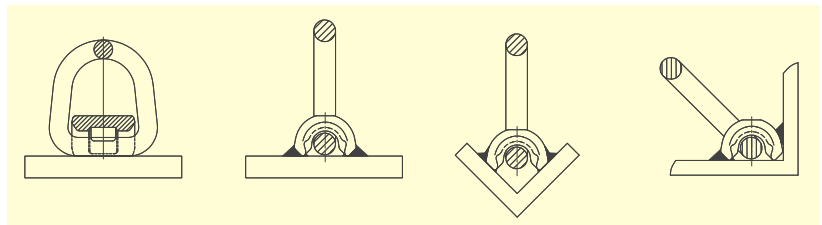

Item No.	Working Load Limit tonnes*	Dimensions (mm)							N.W. kg
		D	F	H	K	L	R	W	
8-0573-01	1.0	14	26	56	37	105	24	48	0.5
8-0573-03	3.0	17	31	63	48	112	29	54	0.9
8-0573-05	5.0	22	37	66	56	154	33	56	1.3
8-0573-08	8.0	26	47	88	68	169	34	55	2.4
8-0573-10	10.0	20	47	88	68	191	41	70	2.8
8-0573-20	20.0**	25	70	123	93	234	50	91	6.5
8-0573-30	30.0**	35	98	145	130	328	70	127	17.2


★ Design factor 5:1

** Design factor 4:1

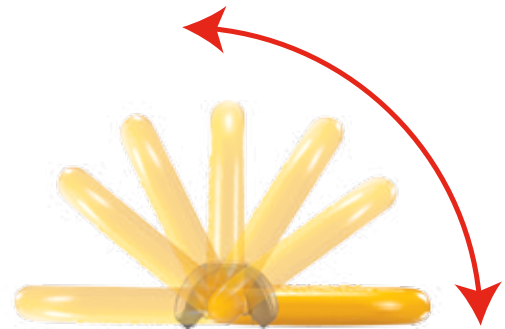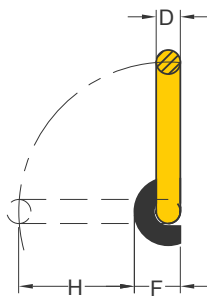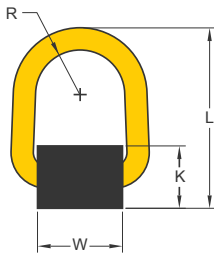




Stop at Any Angle

Weld-on Point. Code "DAA"
Designed with spring, stop at any angle

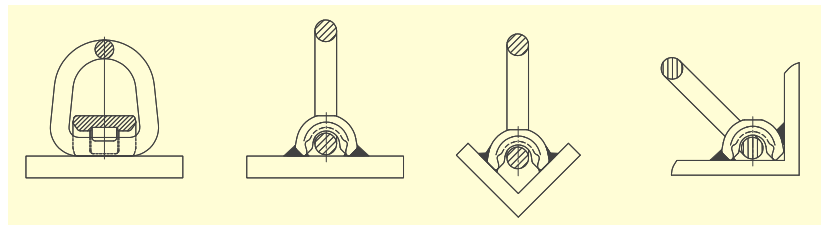

Item No.	Working Load Limit tonnes*	Dimensions (mm)							N.W. kg
		D	F	H	K	L	R	W	
8-057-1T	1.0	14	27	55	38	105	24	50	0.5
8-057-3T	3.0	17	34	60	48	112	29	58	0.9
8-057-5T	5.0	22	43	74	61	154	33	64	1.3
8-057-8T	8.0	26	54	82	73	169	34	61	2.6
8-057-10T	10.0	20	54	103	73	191	41	75	3.1


★ Design factor 5:1

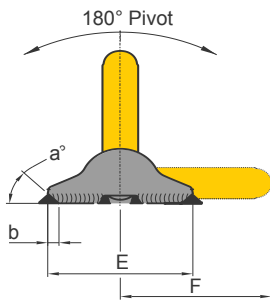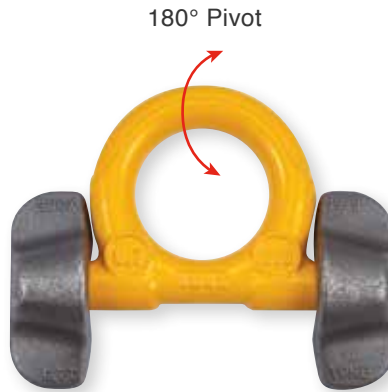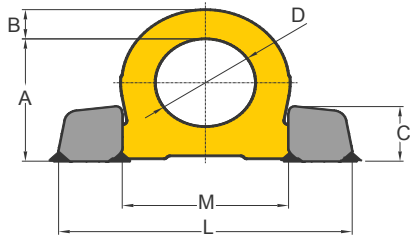

Weld-on Ring

Item No.	Working Load Limit tonnes*	Dimensions (mm)										N.W. kg
		A	B	C	D	E	F	L	M	a°	b	
8-082-04	4	66	14	30	48	65	70	135	76	45	5	0.6
8-082-06	6.7	85	20	39	60	89	91	171	98	45	5	1.5
8-082-10	10	95	21	46	65	100	100	196	106	45	7	2.4
8-082-16	16	127	30	57	90	130	136	263	149	45	8	5.5
8-082-30	31.5	178	42	78	130	160	195	375	213	45	15	15.8

★ Design Factor 4:1

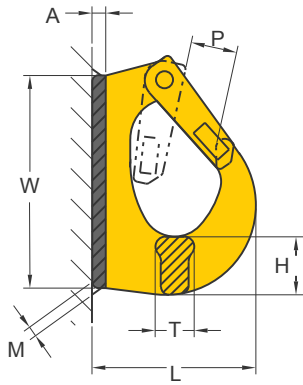



Weld-on Hook

Item No.	Working Load Limit tonnes*	Dimensions (mm)							N.W. kg	Repair Kits	
		A	F	H	L	M	P	T			
8-081-01	1.0	7	25	27	70	4	18	18	95	0.6	8-P081-01
8-081-02	2.0	8	30	30	85	5	25	20	115	1.0	8-P081-02
8-081-03	3.0	9	35	30	107	6	28	23	133	1.4	8-P081-03
8-081-04	4.0	10	42	38	114	7	28	30	142	2.2	8-P081-04
8-081-05	5.0	12	44	47	135	7	30	31	167	3.0	8-P081-05
8-081-08	8.0	12	50	52	137	8	32	39	176	3.7	8-P081-08
8-081-10	10.0	13	56	56	170	8	44	42	222	6.2	8-P081-10
8-081-15	15.0	14	61	67	184	10	54	45	242	7.9	8-P081-15


★ Design factor 5:1

YOKE recommends that the working load limit should be reduced to meet any appropriate legislative requirements, if welding on to an excavator. Please contact your YOKE distributors for further information.

YOKE Insulation Solution

- YOKE Insulated Swivel is designed for winch protection in overhead crane during welding operations.
- Heavy hoisting with a strong but lightweight system.
- Individual swivels & components are 100% proof load tested to a minimum of 2.5 times the working load limit.
- All Swivels are individually tested during manufacturing to assure 1000 Volts insulating property. Test certificate is packaged with each unit shipped.
- YOKE Insulated Swivels are designed with ball bearing which performs to fully swivel under Load.
- Acquired  certificate approved by Deutsche Gesetzliche Unfallversicherung (DGUV) .



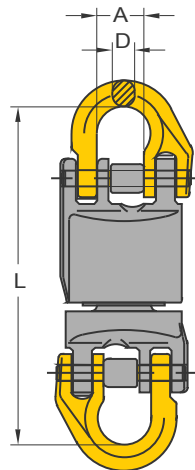


1000 Volts Resistance

Insulated Swivels

with 2 Half Links

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)			N.W. kg
			A	D	L	
8-123-07	2.0	7, 8	18	9	131	0.7
8-123-10	3.15	10	25	11	162	1.5
8-123-13	5.3	13	30	16	214	3.2
8-123-16	8.0	16	36	19	243	5.4
8-123-20	12.5	18, 20	42	22	285	9.0

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

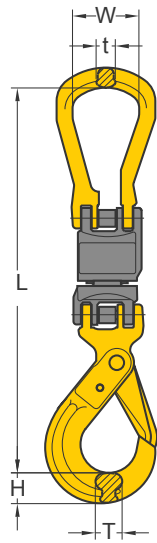

1000 Volts Resistance


Insulated Swivels

with Open Master Link & Coupling Self Locking Hook

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)					N.W. kg
			H	L	T	W	t	
8-124-07	2.0	7, 8	24	310	20	50	15	1.8
8-124-10	3.15	10	30	374	26	65	19	3.3
8-124-13	5.3	13	39	471	30	72	23	6.7
8-124-16	8.0	16	49	560	36	80	25	12.0
8-124-20	12.5	18, 20	62	624	48	104	31	18.0

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677



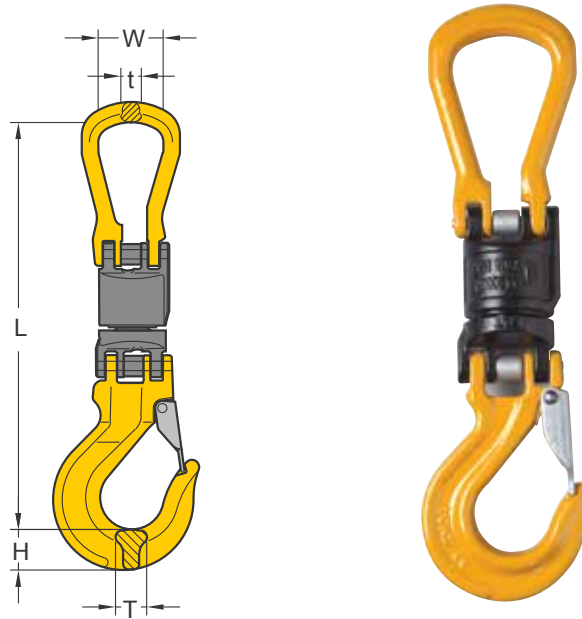

1000 Volts Resistance

Insulated Swivels

with Open Master Link & Sling Hook

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)					N.W. kg
			H	L	T	W	t	
8-125-07	2.0	7, 8	23	267	19	50	15	1.3
8-125-10	3.15	10	31	335	23	65	19	3.0
8-125-13	5.3	13	36	410	28	72	23	5.5
8-125-16	8.0	16	45	484	32	80	25	9.5
8-125-20	12.5	18, 20	48	558	43	104	31	14.7

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

YOKE®

Safety is our first priority™

YP™

Yellow Point





Safety is our first priority™

An ISO 9001 Registered Company

YOKE products distributed by:



YOKE INDUSTRIAL CORP.

#39, 33rd Road,
Taichung Industrial Park,
Taichung 407,
TAIWAN
Tel:+886-4-2350-8088
Fax:+886-4-2350-1001
E-mail: info@mail.yoke.net

www.yoke.net