



»»» Spiralair
SPR 2- 30



Oil free
compressors



User benefits

SPR 2-30 oil-free scroll compressors provide high-quality compressed air for critical applications in a wide range of industries. Continuous investment in research and development has resulted in economical and ecological compressors.

Oil-free quality air

- Ultimate 100% oil-free, clean air.
- No filtration system required to remove residual oil along the network.

Energy efficiency

- No unload power consumption.
- Standard equipped with high-efficiency IE3 motor.

Ultimate reliability and serviceability

- High quality materials, with a minimal number of moving parts ensure a long operating life with minimal service interventions.
- No need for oil change and oil waste management.
- Service friendly vertical layout.

Oil-free compressors

Industries such as pharmaceuticals, food and beverage, electronics and textiles cannot risk any chance of oil contamination in their processes. Therefore, it is essential that the compressed air is 100% oil-free. The standard is ISO 8573-1 (2010) certification, in which Class Zero represents the highest air purity. It is the only way to ensure oil-free air for your critical processes and with it peace of mind.


Outstanding reliability, low maintenance and operating costs make oil-free compressors a sound investment.



Scroll technology: how does it work?

Air compression is achieved through the orbital motion of two spirals. One being static, the second mobile, their interaction pulls the air into the compression chamber. In a regular and continuous way, the mobile spiral compresses the air through a reduction of the volume. The air flow is directed to the center of the spiral after which it is cooled.

As the spirals never make any contact, this compression process does not require any lubrication. Consequently, Spiralair compressors guarantee 100% oil-free compressed air.

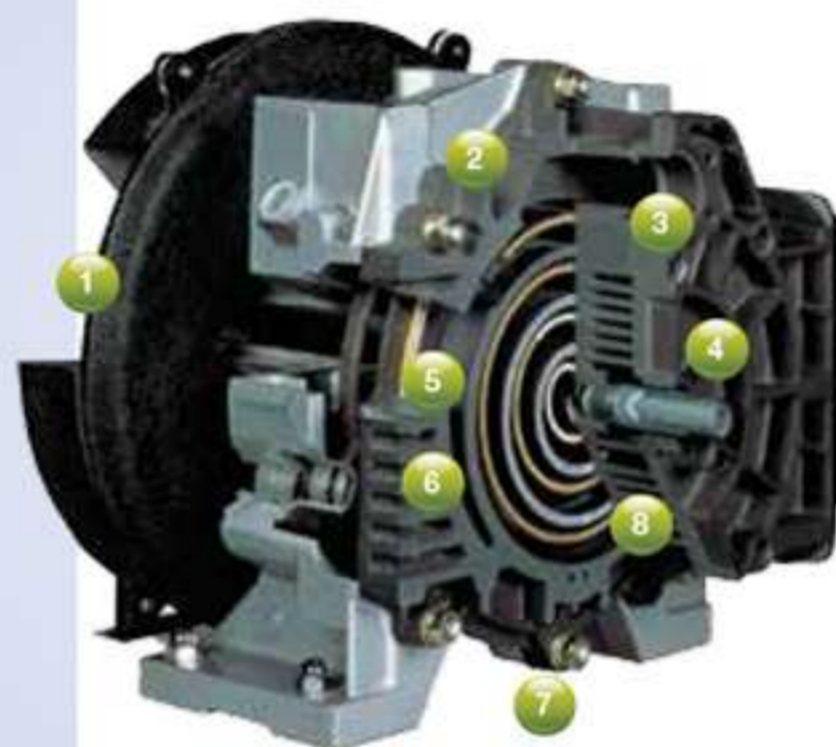

- 1 COOLING FAN
- 2 SUCTION CHAMBER
- 3 SUCTION OPENING
- 4 DELIVERY OPENING
- 5 FIXED SCROLL
- 6 ORBITING SCROLL
- 7 FAIL-SAFE TEMPERATURE SENSOR FOR UNIT PROTECTION
- 8 COMPRESSION CHAMBER



บริษัท นิวแม็กซ์ จำกัด | แพนค AIR COMPRESSOR

107/1 Chaloen Phrakiat R.9 Rd., Praset, Bangkok 10250, Thailand.

Tel. 02-726-8000 ต่อ 640, 644 Email : sales.air@pneumax.co.th

www.pneumax.co.th

»» One package - multiple benefits

State-of-the-art element

- Highly efficient profile.
- Robust, reliable design and easy access for service.
- Lower vibration levels.

Belt driven set

- High-efficiency motor IE3 / NEMA Premium as a standard.
- Totally enclosed air-cooled IP 55 class F motor for heavy duty operation.



Integrated dryer

- Integrated into the package to reduce footprint, maintenance and installation cost.
- Designed to guarantee a constant pressure dew point of +3°C PDP.
- Ensures the delivery of dry high-quality air.



Sound insulated canopy

Allows installation in most working environments without requiring a separate compressor room.

Cool canopy

- Increased ventilation due the vertical design.
- Lower element & air outlet temperatures.
- Oversized cooler improving the performance of the unit.
- Improved canopy design: better dryer performance and easy access.



When technology and ecology join forces

The SPR 2-30 range provides top class performance, premium efficiency and quality. What's more, with an oil-free compressor, you are also reducing your total cost of ownership in three ways: (1) by avoiding expensive filter replacements, (2) cutting maintenance costs for treating oil condensate and (3) the costs of extra energy needed to combat pressure drop across filters.

Premium performance

- Pressure rating up to 10 bar.
- Output from:
 - 6,8 to 147 m³/h.
 - 1,9 to 40,8 l/s.
 - 4,0 to 86,5 cfm.
- Sound levels as low as 53 dB.

Premium efficiency

- Built-in dryer to reduce downstream pressure drop.
- Latest in-house designed compression technology.
- Standard equipped with high-efficiency IE3 motor.

Premium quality

- ISO 8573-1 Class 0* certified quality air.
- Corrosion proof materials.
- Ambient temperature sensor:
 - Standard available on the Spiralair Multi
 - Identification & logging of shutdowns
 - Adjustment of service schedule



Class 0: eliminating any risk

Class 0 represents the best air quality possible. The SpiralAIR compressors are class zero certified, according to ISO 8573-1 class 0 Ed.3 2010 specifications, meeting the needs of the most demanding customers.

Contamination by even the smallest quantities of oil can cause costly production downtime and product spoilage, resulting in product recalls and loss of reputation.

CLASS*

Concentration total oil [aerosol, liquid, vapour] mg/m³

| CLASS | Concentration total oil [aerosol, liquid, vapour] mg/m ³ |
|-------|--|
| 0 | As specified by the equipment user or supplier and more stringent than class 1 |
| 1 | ≤ 0,01 |
| 2 | ≤ 0,1 |
| 3 | ≤ 1 |
| 4 | ≤ 5 |



บริษัท นิวแม็กซ์ จำกัด | แพนก AIR COMPRESSOR

107/1 Chaloen Phrakiat R.9 Rd., Praset, Bangkok 10250, Thailand.

Tel. 02-726-8000 ต่อ 640, 644 Email : sales.air@pneumax.co.th

www.pneumax.co.th

Control and monitoring

The Spiralair range comes with a wide variety of control and monitoring features that allow you to increase your compressor's efficiency and reliability. The SPR 2-8 are equipped with an Electro Pneumatic Control which automatically starts/stops the unit when the required working pressure is reached. The SPR 10-30 come with a Graphic Controller.



Intelligent Graphic Controller (SPR 10-30)

The multiple control and monitoring features of the controller on the SPR 10-30 units dramatically increases the compressor's efficiency and reliability. Efficiency is maximized by controlling the main drive motor and regulating the system pressure within a pre-defined and narrow pressure band.

Control and monitoring features:


- Warning indications.
- Graphical indication service plan.
- Integrated sequence for up to 6 compressors limiting the energy consumption and equalizing running hours across your whole system.
- Online visualization of running conditions.

Variable air delivery

The SPR 10-30 units are equipped with multiple scroll modules. The units utilize Variable Air Delivery technology which controls the required number of modules depending on your air demand. Hence, the Spiralair Multi can adjust to demand fluctuations.

The intelligent controller prevents simultaneous start of the modules and ensures a very narrow pressure band is maintained. This optimizes the efficiency of the compressor and guarantees a very stable system pressure.

SPR 20 (4 modules) Variable Air Delivery

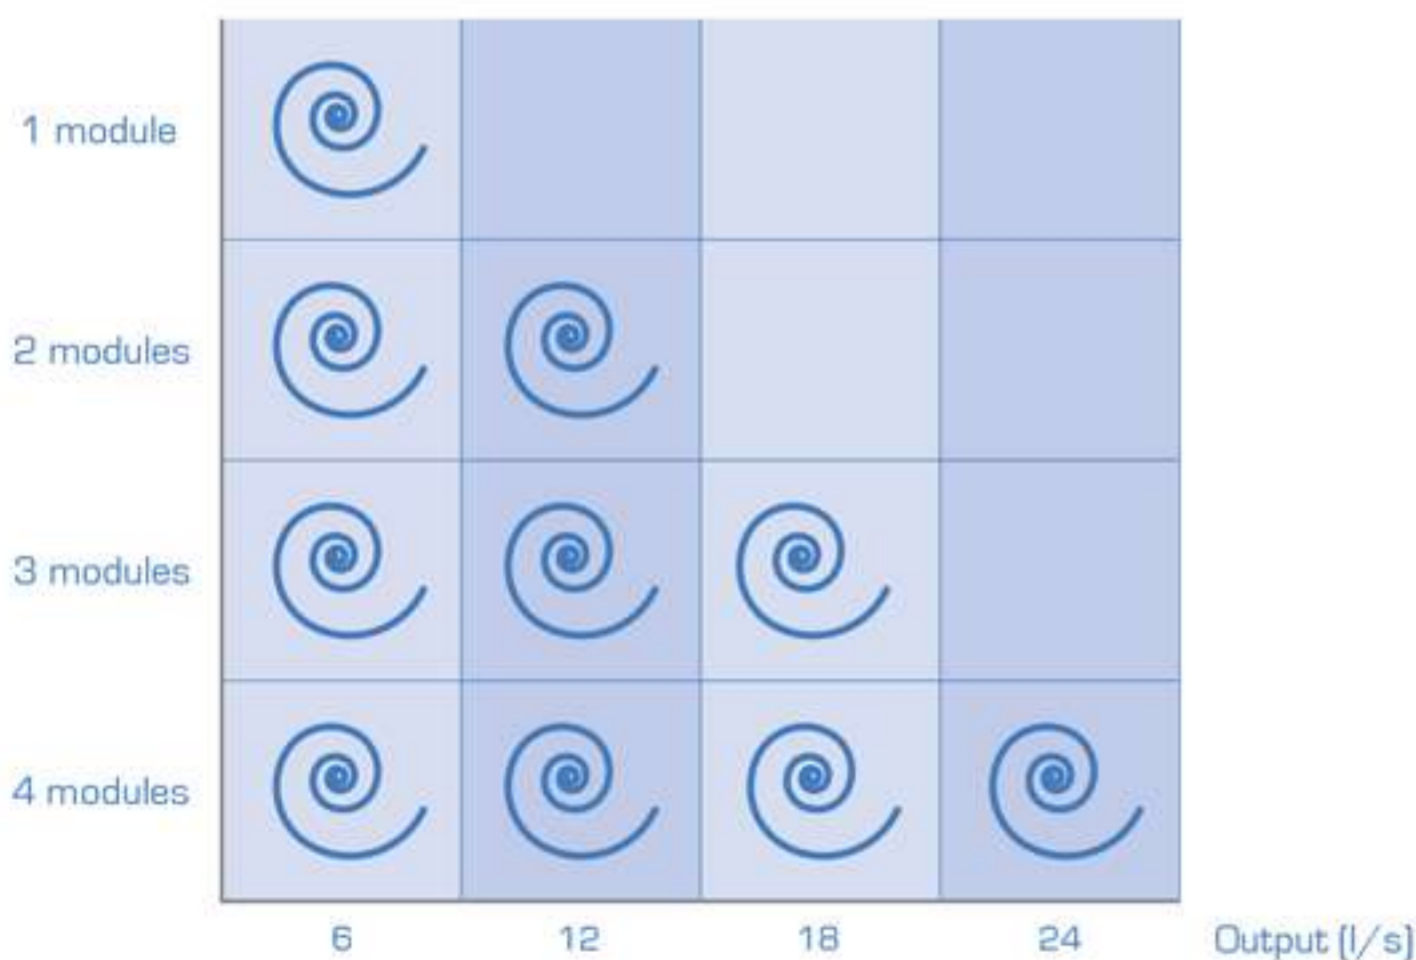

บริษัท นิวแม็กซ์ จำกัด | แพนก AIR COMPRESSOR

107/1 Chaloen Phrakiat R.9 Rd., Praset, Bangkok 10250, Thailand.

Tel. 02-726-8000 ต่อ 640, 644 Email : sales.air@pneumax.co.th

www.pneumax.co.th

Options to optimize your operations

A wide range of options enables you to get the most out of your Spiralair compressor.

General options (SPR 2-8)

- Tank-mounted solution
 - 30 litre
 - 270 litre
 - 500 litre
- Phase sequence relay

Energy efficiency option (SPR 10-30)

- ES6i integrated multiple compressor control for up to 6 compressors

Air quality options (SPR 2-8)

- Integrated refrigerant dryer
- Prefiltration kit
- Water Separator Drain (WSD) (not in combination with an integrated refrigerant dryer)
- Electronic drain on air receiver
 - Standard for 30 litre
 - Optional for 270 & 500 litre



For further information on how our options can optimize your operations, please contact your local representative.





Technical table

| | Model | Max. working pressure | Free Air Delivery | | | Motor power | | Noise level | Weight * |
|-------|--------|-----------------------|-------------------|------|------|-------------|---------|-------------|----------|
| | | bar | m³/h | l/s | cfm | kW | hp | dB(A) | std (kg) |
| Mono | SPR 2 | 8 | 10,4 | 2,9 | 6,1 | 1,5 | 2 | 53 | 120 |
| | | 10 | 6,8 | 1,9 | 4,0 | | | | |
| | SPR 3 | 8 | 15,1 | 4,2 | 8,9 | 2,2 | 3 | 55 | 125 |
| | | 10 | 12,2 | 3,4 | 7,2 | | | | |
| | SPR 5 | 8 | 24,1 | 6,7 | 14,2 | 3,7 | 5 | 57 | 133 |
| | | 10 | 21,2 | 5,9 | 12,5 | | | | |
| SPR 8 | 8 | 35,3 | 9,8 | 20,8 | 5,5 | 7,5 | 59 | 157 | |
| | 10 | 27,4 | 7,6 | 16,1 | | | | | |
| Multi | SPR 10 | 8 | 48,0 | 13,4 | 28,4 | 2 x 3,7 | 2 x 5 | 63 | 485 |
| | | 10 | 40,8 | 11,4 | 24,2 | | | | |
| | SPR 15 | 8 | 73,2 | 20,3 | 43,0 | 2 x 5,5 | 2 x 7,5 | 63 | 515 |
| | | 10 | 54,0 | 15,0 | 31,8 | | | | |
| | SPR 20 | 8 | 95,0 | 26,4 | 55,9 | 4 x 3,7 | 4 x 5 | 63 | 580 |
| | | 10 | 82,8 | 23,0 | 48,7 | | | | |
| | SPR 22 | 8 | 111,6 | 31,0 | 65,7 | 3 x 5,5 | 3 x 7,5 | 64 | 595 |
| | | 10 | 85,2 | 23,7 | 50,2 | | | | |
| | SPR 30 | 8 | 147,0 | 40,8 | 86,5 | 4 x 5,5 | 4 x 7,5 | 65 | 680 |
| | | 10 | 108,0 | 30,0 | 63,6 | | | | |

* The weight stated relates to the floor-mounted units without an integrated dryer. Machines are available in 50 and 60Hz.

Dimensions

| | Length std mm | Width mm | Height mm |
|---------------------------|---------------|----------|-----------|
| SPR 2-8 | | | |
| Base-mounted | 760 | 690 | 840 |
| Base-mounted + dryer | 1025 | 690 | 840 |
| Tank-mounted 270L | 1275 | 690 | 1450 |
| Tank-mounted 270L + dryer | 1275 | 690 | 1450 |
| Tank-mounted 500L | 2055 | 690 | 1450 |
| Tank-mounted 500L + dryer | 2055 | 690 | 1450 |
| SPR 10-15 | 1670 | 750 | 1230 |
| SPR 20-30 | 1630 | 750 | 1844 |



บริษัท นิวแม็กซ์ จำกัด | แพนก AIR COMPRESSOR

107/1 Chaloom Phrakiat R.9 Rd., Pravet, Bangkok 10250, Thailand.

Tel. 02-726-8000 ต่อ 640, 644 Email : sales.air@pneumax.co.th

www.pneumax.co.th

Spiralair
Oil-free compressors
SPR 2-30

Oil free
compressors



- A high quality product and **technology you can trust**
- Choosing our high performance compressor ensures your compressed air **availability**
- Our products are **simple, easy to use** and give strong **reliability**
- **Serviceability** and aftermarket are guaranteed
- Original Parts and Services
- Dealers are always nearby and complete the strong **partnership** you can expect



Increases your profit and improve the image of your company



Contact your local sales representative now!

6999100330



www.oilfreecompressors.eu



บริษัท นิวแม็กซ์ จำกัด | แพนค AIR COMPRESSOR

107/1 Chaloen Phrakiat R.9 Rd., Praset, Bangkok 10250, Thailand.
Tel. 02-726-8000 ต่อ 640, 644 Email : sales.air@pneumax.co.th

www.pneumax.co.th

© 2014, All rights reserved. All mentioned brands, product names, company names, trademarks and service marks are the properties of their respective owners. Our products are constantly being developed and improved. We thus reserve the right to modify product specifications without prior notice. Pictures are not contractually binding.