


## Heads




## Cartridge

**CS** 050 - 070 - 100 - 150  
**CG - CW** 050 - 070

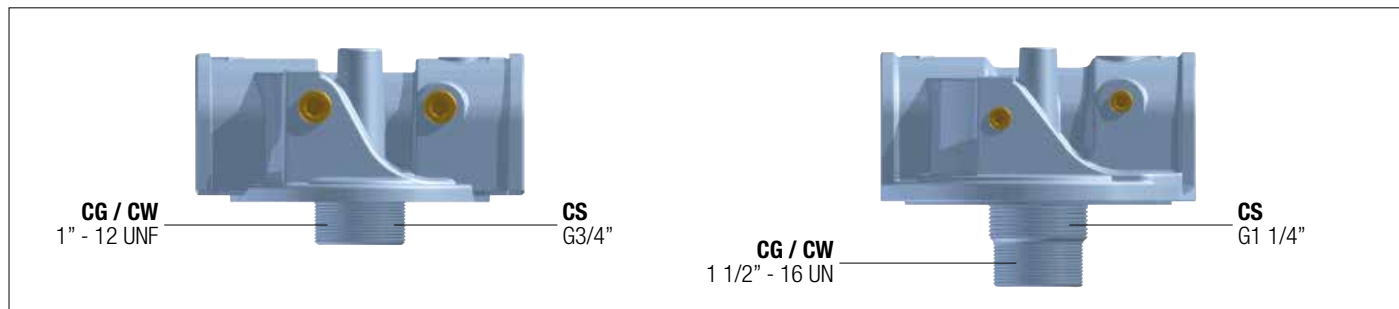

**CG - CW** 100 - 150

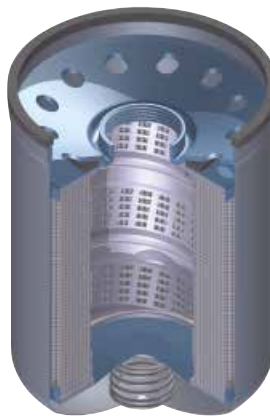

**CW**  
 This series of cartridge removes water from oil while filtering the oil at the same time. Water absorbent polymers up to 800 times their own weight provide this major feature.

Water holding capacities:  
 CW 050= 240 ml  
 Ordering code: **CW050P10AP01**

CW 150= 788 ml  
 Ordering code: **CW150P10AP01**

### Thread connections

Element	Connection
CS 050 - 070	G3/4"
CS 100 - 150	G1 1/4"
CG / CW 050 - 070	1" - 12 UNF
CG / CW 100 - 150	1 1/2" - 16 UN

### Water holding capacities CW

	good	poor
<b>Viscosity</b>	30/46 mm <sup>2</sup> /s (cSt)	> 46 mm <sup>2</sup> /s (cSt)
<b>H<sub>2</sub>O p.p.m.</b>	600/800 p.p.m.	> 800 p.p.m.
<b>Flow rate</b>	CW050 7/15 l/min CW150 20/40 l/min	CW050 > 20 l/min CW150 > 50 l/min
<b>Temperature</b>	40/60 °C	< 30 °C


## CT



### Thread connections

Type	Connection
CT 050 - 070	G3/4"
CT 100 - 150	G1 1/4"

## CH

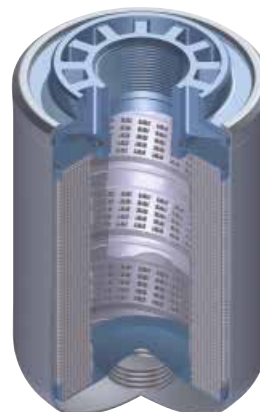

### Thread connections

Type	Connection
CH 050 - 070	M32 x 2
CH 100 - 150	M45 x 2